

## Kit Rohr Universal Standard TIS-K PUR + Universal Standard TIS-K Verbindung




DN	Klasse	Abwinkelbarkeit	PFA
100 mm	C40	3 °	85 bar
150 mm	C40	3 °	63 bar
200 mm	C40	3 °	63 bar
250 mm	C40	3 °	50 bar
300 mm	C40	3 °	41 bar
400 mm	C40	3 °	35 bar
500 mm	C40	3 °	30 bar
700 mm	C30	2 °	27 bar
800 mm	C30	2 °	25 bar
900 mm	C30	1,5 °	25 bar
1000 mm	C30	1,2 °	25 bar
1100 mm	C30	1,1 °	25 bar
1200 mm	C25	1,1 °	20 bar
1200 mm	C30	1,1 °	25 bar
1400 mm	C25	1,2 °	16 bar
1400 mm	C30	1,2 °	25 bar
1500 mm	C25	1 °	16 bar
1600 mm	C25	0,9 °	16 bar

## Zubehör



Werkzeuge für die Montage  
und Demontage der  
Universal TIS-K Verbindung

## Produkte

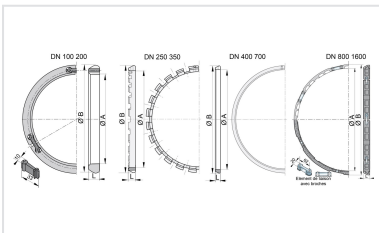

Verbindung Standard  
Universal Tis-K für  
Standard Universal Rohre  
und Formstücke