


## Kit Rohr Standard INTEGRAL TT PE-C + Standard Dichtung



DN	Abwinkelbarkeit	PFA
150 mm	5 °	40 bar
200 mm	5 °	40 bar
250 mm	5 °	38 bar
300 mm	5 °	35 bar
350 mm	4 °	32 bar
400 mm	4 °	30 bar
450 mm	4 °	29 bar
500 mm	4 °	28 bar
600 mm	4 °	26 bar
700 mm	4 °	29 bar
800 mm	4 °	28 bar
900 mm	4 °	27 bar
1000 mm	4 °	26 bar

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN≥800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.

## Produkte

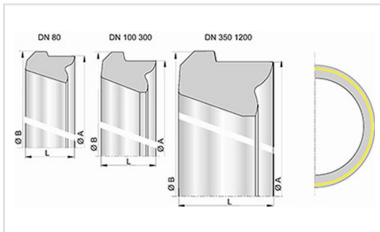

Standard Dichtung für  
Rohre und Formstücke  
PLUVIAL und INTEGRAL