


Kit Rohr Standard PUX + Standard Verbindung



DN	Klasse	Abwinkelbarkeit	PFA	Artikel-Nr.
150	C40	5 °	40 bar	SSB15Q60AH-E00
200	C40	5 °	40 bar	SSB20Q60AH-E00
250	C40	5 °	40 bar	SSB25Q60AH-E00
250	C50	5 °	50 bar	SSB25D60AH-E00
300	C40	5 °	40 bar	SSB30F60AH-E00
350	C30	4 °	30 bar	SSB35G60AH-E00
400	C30	4 °	30 bar	SSB40G60AH-E00
450	C30	4 °	30 bar	SSB45G60AH-E00
500	C30	4 °	30 bar	SSB50G60AH-E00
500	C40	4 °	40 bar	SSB50F60AH-E00
600	C30	4 °	30 bar	SSB60G60AH-E00
700	C25	4 °	25 bar	SSB70H70AH-E00
800	C25	4 °	25 bar	SSB80H70AH-E00
1000	C25	4 °	25 bar	SSC10H70AH-E00
1100	C25	4 °	25 bar	SSC11H80AH-E00
1500	C25	3 °	25 bar	SSC15H80AH-E00
1800	C25	2,5 °	25 bar	SSC18H80AH-E00
2000	C25	2 °	25 bar	SSC20H80AH-E00

(*) auf Anfrage

Produkte

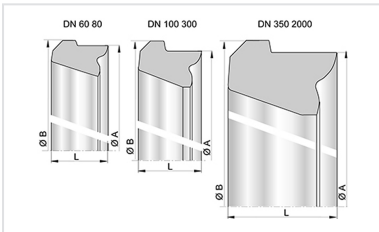

Dichtung Standard für
Rohre und Formstücke