

Kit Rohr Universal Standard TIS-K INTEGRAL + Universal Standard TIS-K Verbindung




DN	Abwinkelbarkeit	PFA
150 mm	3 °	60 bar
200 mm	3 °	52 bar
250 mm	3 °	46 bar
300 mm	3 °	41 bar
350 mm	3 °	38 bar
400 mm	3 °	35 bar
450 mm	3 °	32 bar
500 mm	3 °	30 bar
600 mm	2 °	30 bar
700 mm	2 °	27 bar
800 mm	2 °	25 bar
900 mm	1,5 °	25 bar
1000 mm	1,2 °	25 bar
1200 mm	1,1 °	20 bar
1400 mm	1,2 °	16 bar
1600 mm	0,9 °	16 bar

Zubehör



Werkzeuge für die Montage
und Demontage der
Universal TIS-K Verbindung

Produkte

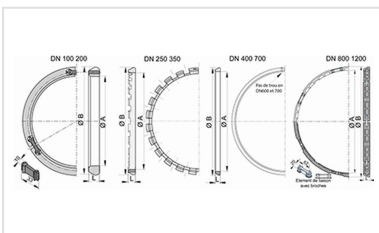

Universal Standard TIS-K
Verbindung für INTEGRAL
Universal Rohr und
Formstücke