



## Kit Rohr Universal Standard TIS-K PE-U + Universal Standard TIS-K Verbindung

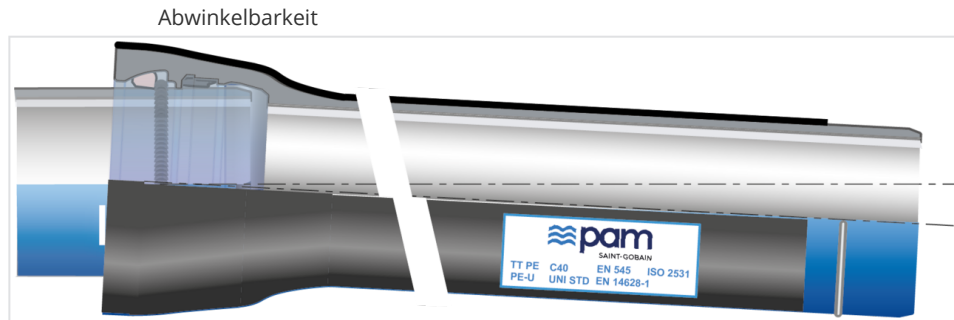

DN	Klasse	Abwinkelbarkeit	PFA
100 mm	C100	3 °	85 bar
125 mm	C64	3 °	63 bar
150 mm	C64	3 °	63 bar
200 mm	C64	3 °	63 bar
250 mm	C50	3 °	50 bar
300 mm	C50	3 °	41 bar
350 mm	C40	3 °	38 bar
400 mm	C40	3 °	35 bar
450 mm	C40	3 °	32 bar
500 mm	C40	3 °	30 bar
600 mm	C40	2 °	30 bar
700 mm	C30	2 °	27 bar
800 mm	C30	2 °	25 bar
900 mm	C30	1,5 °	25 bar
1000 mm	C30	1,2 °	25 bar

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN≥800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.

## Produkte

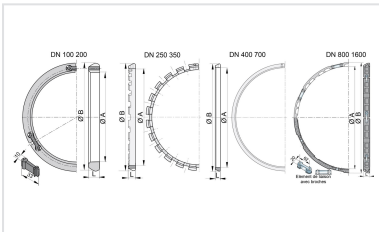

Verbindung Standard  
Universal Tis-K für  
Standard Universal Rohre  
und Formstücke



Werkzeuge für die Montage  
und Demontage der  
Universal TIS-K Verbindung