


Kit Rohr Standard INTEGRAL + Standard Dichtung



DN	Abwinkelbarkeit	PFA
150 mm	5 °	40 bar
200 mm	5 °	40 bar
250 mm	5 °	38 bar
300 mm	5 °	35 bar
350 mm	4 °	32 bar
400 mm	4 °	30 bar
450 mm	4 °	29 bar
500 mm	4 °	28 bar
600 mm	4 °	26 bar
700 mm	4 °	29 bar
800 mm	4 °	28 bar
900 mm	4 °	27 bar
1000 mm	4 °	26 bar
1100 mm	4 °	29 bar
1200 mm	4 °	29 bar
1400 mm	3 °	28 bar
1500 mm	3 °	27 bar
1600 mm	3 °	27 bar
1800 mm	2,5 °	27 bar
2000 mm	2 °	26 bar

Produkte

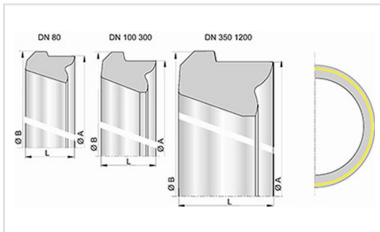

Standard Dichtung für
Rohre und Formstücke
PLUVIAL und INTEGRAL