


Dichtung Standard V+i für Standard Formstücke

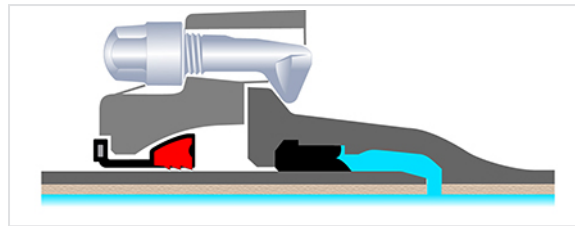

The anchored Standard V+i joint is a push-in anchored joint. Leak tightness is provided by a Standard gasket. The axial force is transmitted by a mechanical device that is independent from the actual leak tightness, which includes: an anchoring gasket with inserts embedded in the elastomer, a gland and iron bolts.

DN	Artikel-Nr.
350 mm	JSB35V-E11
400 mm	JSB40V-E11
450 mm	JSB45V-E11
500 mm	JSB50V-E11
600 mm	JSB60V-E11

Details


DN	Masse Gegenring	Artikel-Nr. Gegenring	Masse NOVO-SIT Haltering	Artikel-Nr. Haltering Universal Vi	Artikel-Nr. Haltering Universal Vi	Artikel-Nr. für Standard Dichtung	Artikel-Nr. für Standard Dichtung	Benötigte Anzahl	Artikel-Nr. Schrauben
mm	kg		kg		kg		kg		
350	30.500	JSB35V	1.470	JNB35CA	0.898	JSB35BA	6.320	8	JXM27BN102
400	37.700	JSB40V	1.700	JNB40CA	1.077	JSB40BA	7.900	10	JXM27BN102
450	43.000	JSB45V	1.870	JNB45CA	1.323	JSB45BA	11.060	14	JXM27BN102
500	61.700	JSB50V	2.540	JNB50CA	1.544	JSB50BA	12.640	16	JXM27BN102
600	63.500	JSB60V	3.000	JNB60CA	2.162	JSB60BA	15.800	20	JXM27BN102

Zubehör




Dichtung Standard für
Rohre und Formstücke


Produkte

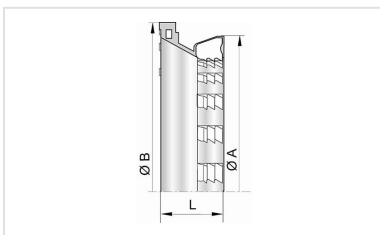

NOVO-SIT Haltering
DN80-700

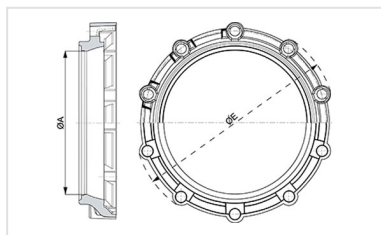

Gland for STD Ve joint
DN80-1200

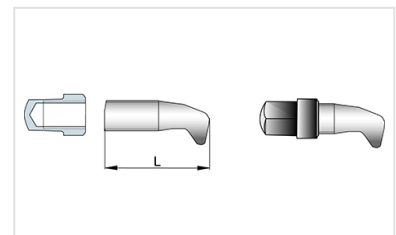

Iron bolt for STD Ve joint