



TYTON Verbindung für ZMU Rohre DN80-300

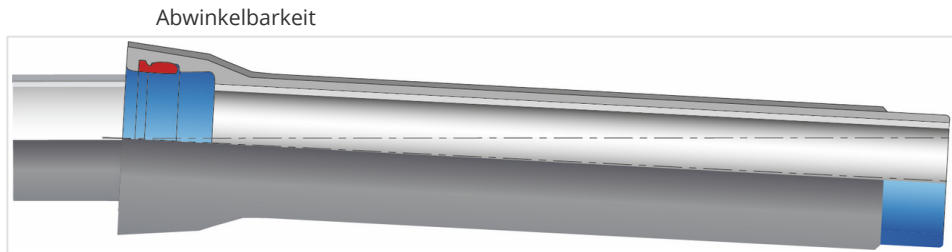

| DN | Klasse | Abwinkelbarkeit | PFA |
|--------|--------|-----------------|--------|
| 80 mm | C50 | 5 ° | 50 bar |
| 100 mm | C50 | 5 ° | 50 bar |
| 125 mm | C50 | 5 ° | 50 bar |
| 150 mm | C50 | 5 ° | 50 bar |
| 200 mm | C50 | 5 ° | 50 bar |
| 250 mm | C50 | 5 ° | 50 bar |
| 300 mm | C50 | 5 ° | 50 bar |

Produkte

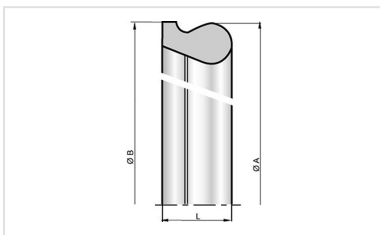

Tyton Dichtung für Rohre
und Formstücke DN80-300