



Kit Standard Rohr PUR + Standard Verbindung

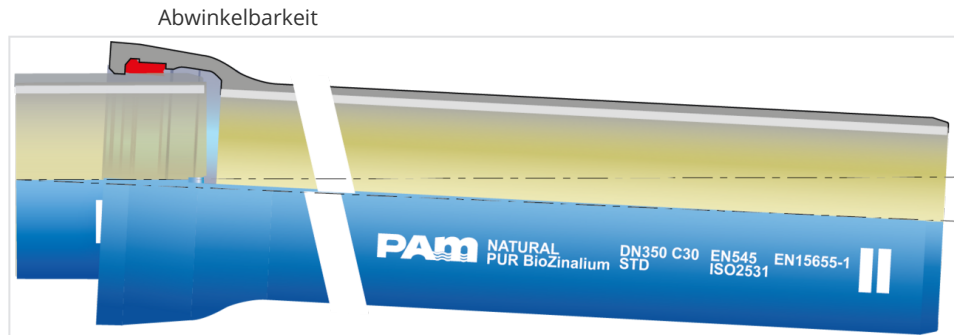

| DN | Klasse | Abwinkelbarkeit | PFA |
|---------|--------|-----------------|--------|
| 100 mm | C40 | 5 ° | 40 bar |
| 100 mm | C64 | 5 ° | 64 bar |
| 125 mm | C40 | 5 ° | 40 bar |
| 125 mm | C64 | 5 ° | 64 bar |
| 150 mm | C40 | 5 ° | 40 bar |
| 150 mm | C64 | 5 ° | 64 bar |
| 200 mm | C40 | 5 ° | 40 bar |
| 200 mm | C50 | 5 ° | 50 bar |
| 250 mm | C40 | 5 ° | 40 bar |
| 300 mm | C40 | 5 ° | 40 bar |
| 350 mm | C30 | 4 ° | 30 bar |
| 400 mm | C30 | 4 ° | 30 bar |
| 450 mm | C30 | 4 ° | 30 bar |
| 450 mm | C40 | 4 ° | 40 bar |
| 500 mm | C30 | 4 ° | 30 bar |
| 500 mm | C40 | 4 ° | 40 bar |
| 600 mm | C30 | 4 ° | 30 bar |
| 600 mm | C40 | 4 ° | 40 bar |
| 700 mm | C25 | 4 ° | 25 bar |
| 800 mm | C25 | 4 ° | 25 bar |
| 900 mm | C25 | 4 ° | 25 bar |
| 1000 mm | C25 | 4 ° | 25 bar |
| 1100 mm | C25 | 4 ° | 25 bar |

| DN | Klasse | Abwinkelbarkeit | PFA |
|---------|--------|-----------------|--------|
| 1200 mm | C25 | 4 ° | 25 bar |
| 1400 mm | C25 | 3 ° | 25 bar |
| 1500 mm | C25 | 3 ° | 25 bar |
| 1600 mm | C25 | 3 ° | 25 bar |
| 1800 mm | C25 | 2,5 ° | 25 bar |

Produkte

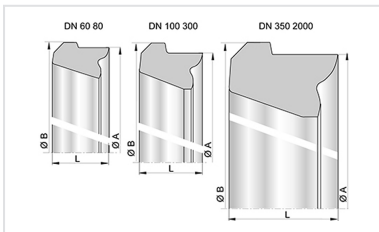

Dichtung Standard für
Rohre und Formstücke