


Kit Universal Standard TIS-K Rohr + Universal Standard TIS-K Verbindung

Abwinkelbarkeit

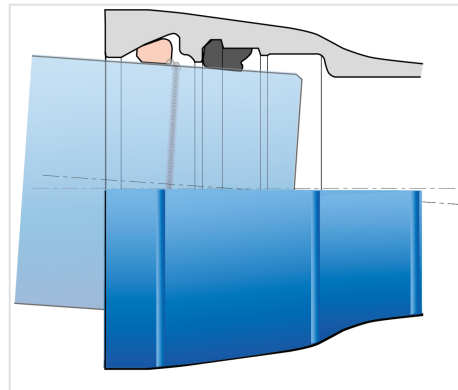

DN	Klasse	Abwinkelbarkeit	PFA
100	C100	3 °	85 bar
125	C64	3 °	63 bar
150	C64	3 °	63 bar
200	C64	3 °	63 bar
250	C50	3 °	50 bar
300	C50	3 °	41 bar
350	C40	3 °	38 bar
400	C40	3 °	35 bar
450	C40	3 °	32 bar
500	C40	3 °	30 bar
600	C40	2 °	30 bar
700	C30	2 °	30 bar
700	C40	2 °	32 bar
800	C30	2 °	25 bar
800	C25	2 °	16 bar
900	C30	1,5 °	25 bar
1000	C30	1,2 °	25 bar
1100	C30	1,1 °	25 bar
1200	C25	1,1 °	20 bar
1200	C30	1,1 °	25 bar
1400	C25	1,2 °	16 bar


DN	Klasse	Abwinkelbarkeit	PFA
1400	C30	1,2 °	25 bar
1500	C25	1 °	16 bar
1600	C25	0,9 °	16 bar
1800	C30	0,8 °	16 bar

Zubehör




Werkzeuge für die Montage und Demontage der Universal TIS-K Verbindung


Produkte

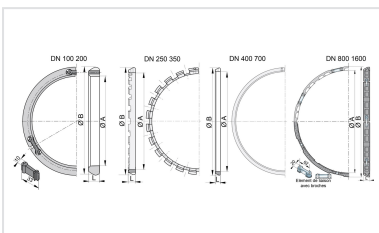

Verbindung Standard Universal Tis-K für Standard Universal Rohre und Formstücke

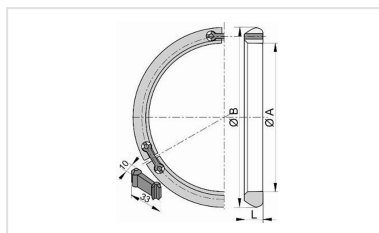

Haltering TIS-K

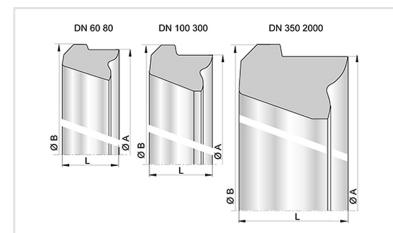

Dichtung Standard für Rohre und Formstücke