



Kit Tyton Rohr + Tyton Sit-Plus Verbindung

Abwinkelbarkeit

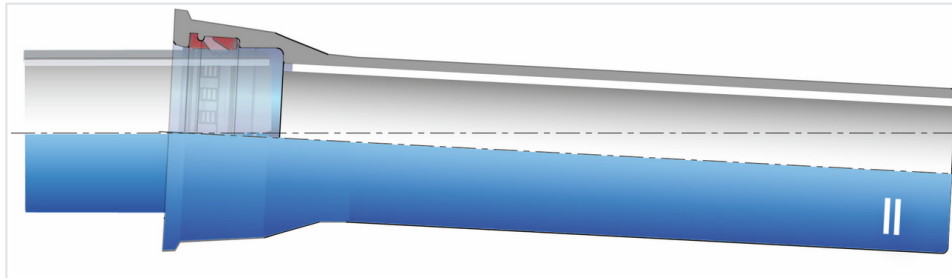

DN	Klasse	Abwinkelbarkeit	PFA
80	C50	3 °	16 bar
100	C50	3 °	16 bar
125	C50	3 °	16 bar
150	C50	3 °	16 bar
200	C50	3 °	16 bar
250	C40	3 °	16 bar
250	C50	3 °	22 bar
300	C40	3 °	16 bar
300	C50	3 °	25 bar

Produkte

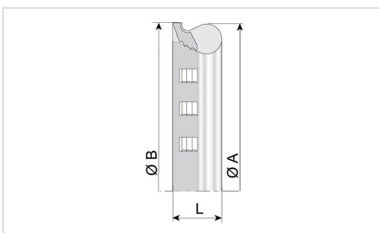

TYTON-SIT Plus Dichtung
für Rohre und Formstücke
DN80-300