
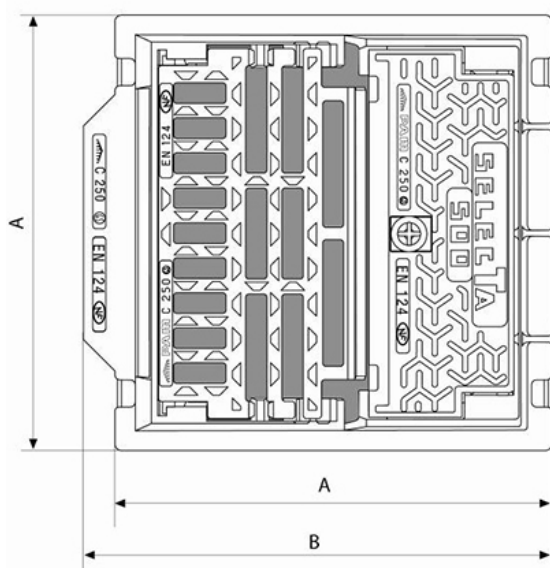


<b>SELECTA</b> <b>MUNICIPAL CASTINGS</b>		11/17/2021
		<b>VC25BENSEL209</b>

## SELECTA 500 Gully unit T profile - Grating with selector bar - C250 class

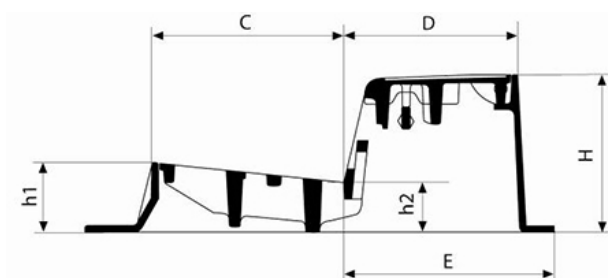

AxB	C	D	E	H	h1	h2	Grat- ing mass	Cover mass	Mass of frame + extension	Total mass	Water- way area	Packaging	References
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg	dm <sup>2</sup>		
570x610	250	225	273	205	90	65	16.5	14.0	24.0	54.5	8.5	10	ECSE61TF

### Material and coating:

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

### Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.

SELECTA MUNICIPAL CASTINGS		11/17/2021
		VC25BENSEL209

- Compatible with the T2, T3, T4 and T5 kerbs and CS2, CS3 and CS4 gutters according standard to NF P 98-340.

### Main characteristics:

- Grating and cover:
  - Hinged separately and can be easily dismantled
  - Secured by spring-bar lock requiring a tool for the opening.
- Grating:
  - With raised selector bar allowing the screening of debris
  - Optimized design for absorption and safety.
- Clear opening Ø 385 mm.