


Concave SQUADRA grating 400 - C250 class

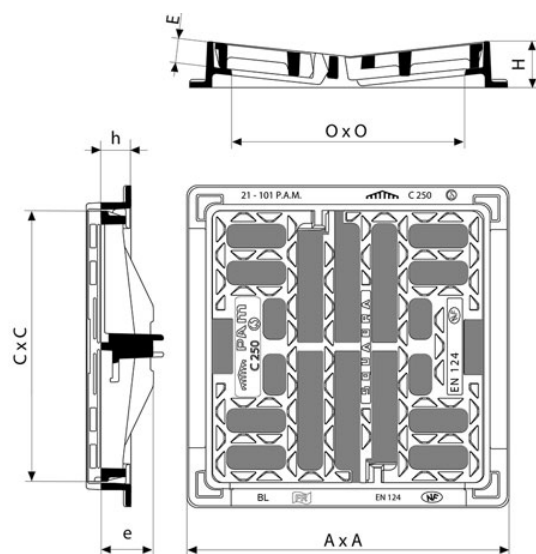

AxA	CxC	OxO	H	h	E	e	Grating mass	Total mass	Waterway area	Packaging	References
mm	mm	mm	mm	mm	mm	mm	kg	kg	dm ²		
410x410	350x350	303x303	58	40	30	67	13.2	20.6	5.00	10	ECSQ40CF

Width holes: 29 to 30 mm - Length holes: 71 to 148 mm

Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: bituminous coating

Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Omnidirectional punctual collection.

Main characteristics:

- Automatic locking by spring bar.
- Simple assembly and fast disassembling.
- Protection against theft, cannot be dismantled without tool.
- Anti-skid surface designed to optimize water absorption.
- Frame with plane sole facilitating the bedding.