


## Express Vi Kit for Express Pipes and Fittings DN300

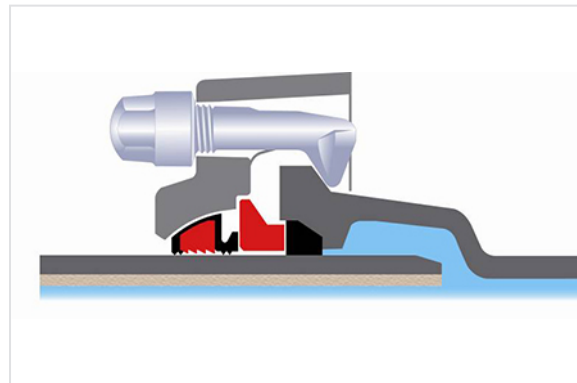

The Express joint is a mechanical joint. The watertightness is made by the axial compression of an elastomer gasket thanks to a gland tightened with iron bolts.

DN	Mass	References
300 mm	36.76 kg	JEB30LNN2

### Field of use:

- For drinking water networks

### Main characteristics:

- Elastomer quality: EPDM (EN 681-1)
- Coating of the gland: Aquacoat fittings
- Iron bolts (Galvanization + parkerization + black cataphoresis)
- EN 545
- High angular deflection possible

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*

*COPYRIGHT AND DESIGN RIGHT: This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request*