


OPT-EMAX D400 ACCESS COVERS

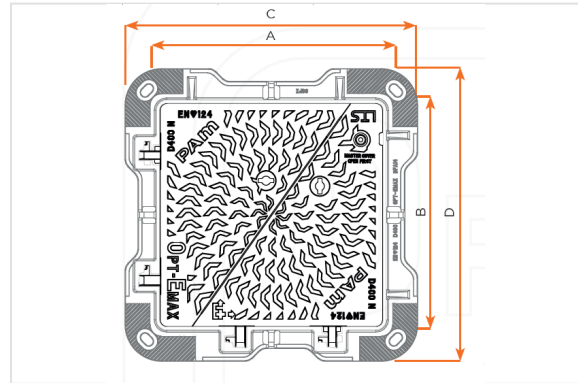

RECOMMENDED FOR USE IN:

City roads carrying continuous traffic where frequent access to below ground assets is required.


Available in a wide range of clear openings and in 100mm or 150mm frame depths, Opt-Emax is the ergonomic solution for the frequent maintenance and inspection of below ground assets.

Label	AxB	CxD	E	Cover mass	Total Mass	Packaging	Product code
230108	2250x750 mm	2420x940 mm	100 mm	43 kg	358.00 kg	1	H591 1
185719	600x450 mm	802x652 mm	150 mm	22 kg	83.50 kg	10	BA02 1
185744	1220x685 mm	1380x685 mm	100 mm	39 kg	216.80 kg	5	BA78
186785	750x750 mm	905x940 mm	100 mm	43 kg	131.30 kg	5	H510
215590	1830x685 mm	2000x885 mm	100 mm	39 kg	347.70 kg	1	BA96
186787	750x600 mm	940x745 mm	100 mm	41 kg	117.50 kg	5	H524
205457	1200x750 mm	1350x945 mm	100 mm	41 kg	217.30 kg	5	H564
186789	1060*700 mm	1210x850 mm	100 mm	43 kg	170.30 kg	5	H530
186795	1800X750 mm	1995x940 mm	100 mm	41 kg	316.70 kg	1	H584
211029	600x600 mm	800x800 mm	100 mm	27.4 kg	105.70 kg	10	BA14
211032	900x600 mm	1100x800 mm	150 mm	35.8 kg	143.60 kg	5	BA60
211562	1220X685 mm	1380x885 mm	150 mm	39 kg	253.90 kg	5	BA84
211563	675x675 mm	880x880 mm	100 mm	38.4 kg	143.40 kg	5	BA30
CDOP19GK	1500x750 mm	1660x940	100 mm	46 kg	242.70 kg	5	H571
242791	750x700 mm	950x825 mm	100 mm	38.5 kg	128.50 kg	1	H525
230384	1340x900 mm	1500x1060 mm	100 mm	55 kg	272.00 kg	3	BA88



Label	AxB	CxD	E	Cover mass	Total Mass	Packaging	Product code
230385	2010x900 mm	2170x1060 mm	100 mm	55 kg	398.00 kg	1	BA98
185735	900x600 mm	1100x800 mm	100 mm	36 kg	137.00 kg	5	BA54
172472	600x600 mm	800x800 mm	100 mm	27 kg	96.00 kg	10	BA06
283181	920x450	1110x640	100 mm	34 kg	108.00 kg	5	BA48
228735	910x900 mm	1163x1155 mm	125 mm	68 kg	210.80 kg	5	BA66

DURABILITY

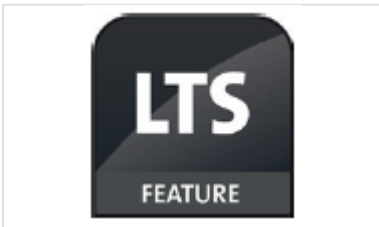

Includes the Load Transfer System (LTS) for optimum installation and product durability

SECURITY



High security retro-fit anti-theft options to deter unauthorised access offering increased asset security

PERFORMANCE D400



Three point suspension ensures non-rock and silent in operation performance



ACCREDITATION

Third party certified by BSI and kite marked to the requirements of BS EN 124. Compliant to the requirements of Highways England advice note HA104/09

ROAD SAFETY >70 PSRV RATING



Radial raised chequer design with independently verified skid & slip resistance values

SAVE COST AND TIME - INSTALL PLUS



Key sizes available with the Install Plus frame levelling and installation system

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT: This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request