


PRODUCT DATASHEET

RECOMMENDED FOR USE IN:

Carriageways carrying continuous traffic where frequent access to below ground assets and proven skid resistant performance is required.

GripTop Opt-Emax offers a permanent high friction solution for where road design or configuration requires a product that demonstrates higher anti-skid properties such as the approaches to pedestrian crossings, traffic lights, roundabouts and junctions.

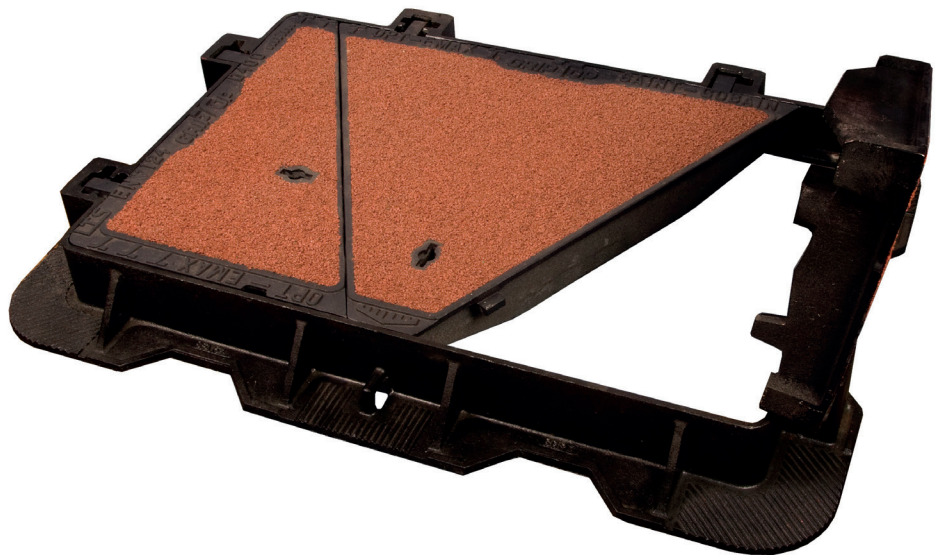

DURABILITY

Includes the Load Transfer System (LTS) for optimum installation and product durability.



SECURITY

High security retro-fit anti-theft options to deter unauthorised access offering increased asset security



HEALTH & SAFETY

Individually hinged cover sections ensuring safe operation by reducing the effort required when opening and closing



PERFORMANCE

Three point suspension ensures non-rock and silent in operation performance



ACCREDITATION

Third party certified by BSI and kite marked to the requirements of BS EN 124. Compliant to the requirements of Highways England advice note HA104/09



ROAD SAFETY

Exceeds the requirements as stated within paragraph 3.4 of Chapter 3: Design Considerations for Chamber Tops within HA104/09. The PSRV has been independently verified in accordance with the requirements and methodology stated within BS9124



SAVE TIME & COST

Key sizes available with the Install Plus frame levelling and installation system



Saint-Gobain PAM UK

Tel: 0115 930 5000

www.saint-gobain-pam.co.uk

Email: sales.uk.pam@saint-gobain.com

GRIPTOP OPT-EMAX D400 HIGH FRICTION ACCESS COVER RANGE

ISSUE NO:

SGPUK016

DATE:



03.2018

Manufactured in the UK to the highest Quality, Environmental and Health and Safety standards.

PRODUCT DATASHEET

GRIP TOP OPT-EMAX D400 HIGH FRICTION ACCESS COVER RANGE

SAP CODE	CLEAR OPENING A x B (mm)	OVER BASE C x D (mm)	DEPTH E (mm)	MASS OF COVER (kg)	TOTAL MASS (kg)	BEARING PRESSURE (N/mm ²)	PALLET QUANTITY	PREVIOUS REF
212925	600 x 600	800 x 800	100	28	95	1.85	10	MA06
212929	600 x 600	800 x 800	150	28	106	1.85	10	MA14
212926	675 x 675	875 x 875	100	38	120	1.89	10	MA22
212930	675 x 675	875 x 875	150	38	142	1.89	5	MA30
TBC	750 x 600	940 x 745	100	39	118	2.27	5	M524
212927	900 x 600	1100 x 800	100	24.5 & 36.5*	135.5	1.61	5	MA54
212931	900 x 600	1100 x 800	150	24.5 & 36.5*	144.5	1.61	5	MA60
TBC	1200 x 750	1350 x 945	100	39	218	1.59	5	M564
212928	1220 x 685	1380 x 885	100	38	214	1.11	5	MA78
212932	1220 x 685	1380 x 885	150	38	249	1.11	5	MA84
TBC	1800 x 750	1955 x 940	100	39	317	TBC	1	M584
222259	1830 x 685	2000 x 885	150	39	354	1.06	1	MA96

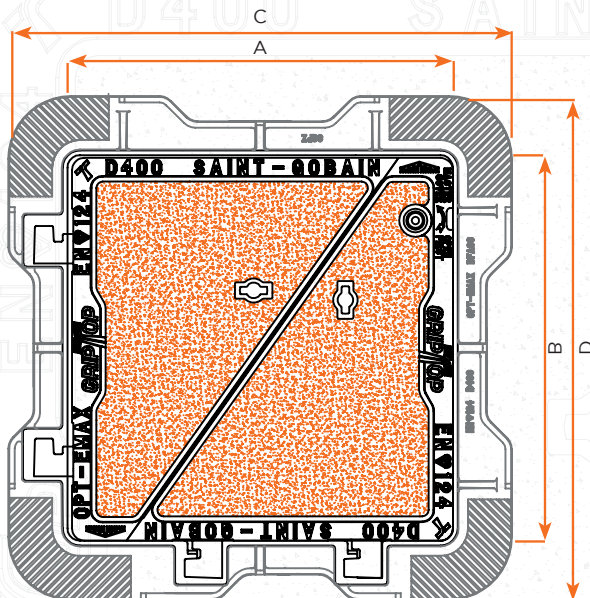

COVER CONFIGURATION FOR 212925,
212926, 212929 & 212930

For details of the standard range Opt-Emax range please refer to data sheets SGPUK 001 and SGPUK002

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT

This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request.