

FH1 Fire Hydrant

DN80, PN16

FH1 Fire Hydrant to BS 750, Type 1 offers higher discharge rates than the FH2 version.

Main features


- Robust design with minimal maintenance requirements
- Utilises the PAM GateWay gate valve
- Conforms totally to BS 750
- Ductile iron construction
- All non-metallic parts are WRAS approved
- Equipped with frost plug as standard
- 2 1/2" London round thread to BS 750:2006
- Blue fusion bonded epoxy coating in accordance with BS EN 14901

Technical information

- Fully compliant with requirements of BS EN 14339, BS EN 1074-6 and BS 750
- Maximum operating temperature 60°C
- Blue fusion bonded epoxy coating to BS EN 14901
- Flanges to BS EN 1092-2 PN16
- Weight 32kg
- Direction of closure clockwise as standard
- Stem seals and stem cap to BS 750:2006
- Drainage system
 - time to drain <10 minutes
 - water retained after draining <100ml
- MOT 140 Nm
- MST 700 Nm
- Kv 154
- Number of turns
 - to start flow <1
 - to fully open 7.5



Technical Features

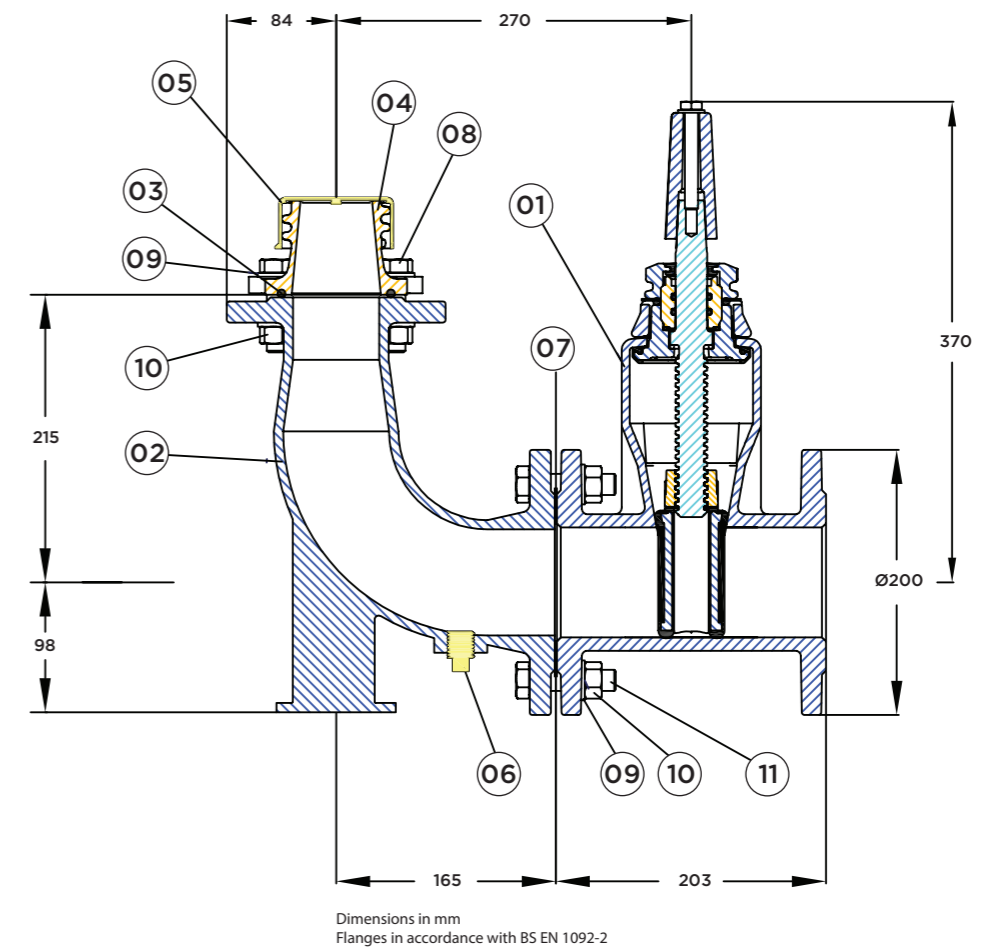

Materials

Ref	Quantity	Description	Material
01	1	DN80 gate valve	Refer to PAM Gate Way data sheet
02	1	Duckfoot bend	Ductile iron Gr. 420/5
03	1	Outlet 'O' ring	EPDM
04	1	Outlet - 2 1/2" LRT	Stainless steel
05	1	Outlet cap	Polyethylene
06	1	Frost plug	Acetal/brass/steel
07	1	Flange gasket	EPDM
08	4	Hex - head bolt	Stainless steel Gr. A2-70
09	16	Washer	Stainless steel Gr. A2-71
10	12	Hex - nut	Stainless steel Gr. A2-72
11	8	Hex - head bolt	Stainless steel Gr. A2-73