

Rexus D400 Hinged Grating Range



This single piece hinged grating makes maintenance and cleaning operations easier and safer. Available in 100mm or 150mm frame depths and a choice of left hand, right hand or kerb-facing hinge orientations, the Rexus grating range can be used on any road, including one-way systems.

DURABILITY:

To aid the reduction of whole life costs, the Rexus grating incorporates the Load Transfer System (LTS) to radically improve installation and product lifespan lowering the frequency of reinstatement and replacement.

HEALTH & SAFETY:

To help reduce work-related injuries, an ergonomic hinged design makes opening simpler, easier and safer to access the drainage network.

ACCREDITATION:

Third party certified by BSI and kite marked to the requirements of BS EN 124. Compliant with the requirements of National Highways advice note CD534

SECURITY:

A hinged grating and an integral automatic spring bar locking mechanism combine to offer enhanced anti-theft and security capabilities. Security can be increased further as the Rexus has the capability to have a turnbuckle locking kit fitted retrospectively.

PERFORMANCE:

The unit is non rock and silent in operation. Large multi-directional wedge seatings enhance stability and durability which reduces whole life costs.


WATER CLEARING EFFICIENCY:

An efficient water clearing capacity aids the effective removal of surface water


Recommended for use in:

Carriageways carrying continuous heavy traffic where frequent access and maintenance to drainage network is required.


Product Code	BS EN124 Class	Opening Orientation	Nominal clear opening (A x B)	Overbase (C x D)	Depth (E)	Waterway area (cm ²)	HA102 ref	Total mass (kg)	Pallet quantity	Internal ref
211145	D400		600 x 600	800 x 800	100	1870	N/A	88	14	H465 1
211608	D400	Left Hand Opening	600 x 600	800 x 714	100	1870	Q	85	14	H466L 1
211607	D400	Right Hand Opening	600 x 600	800 x 714	100	1870	Q	85	10	H466R 1
287507	D400		600 x 600	800 x 800	150	N/A	96	10	HR475	
287508	D400	Left Hand Opening	600 x 600	800 x 715	150	1870	Q	92	10	HR475L

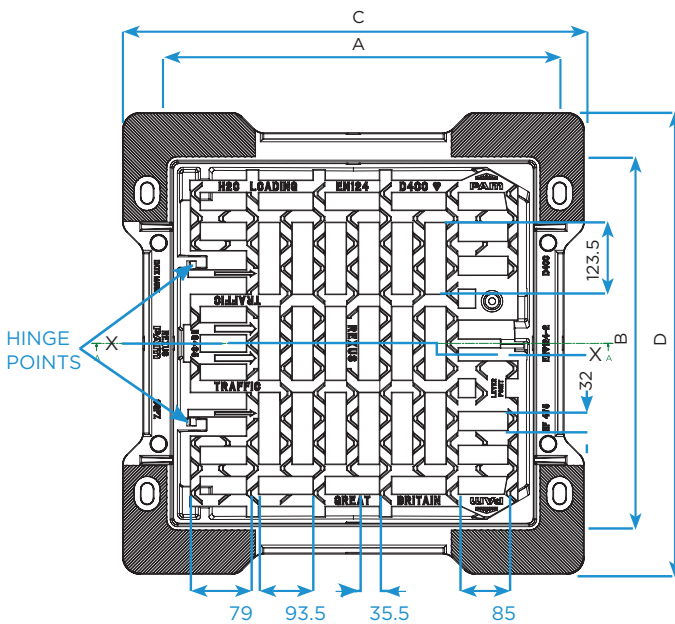


4 flanged version shown product code 211145

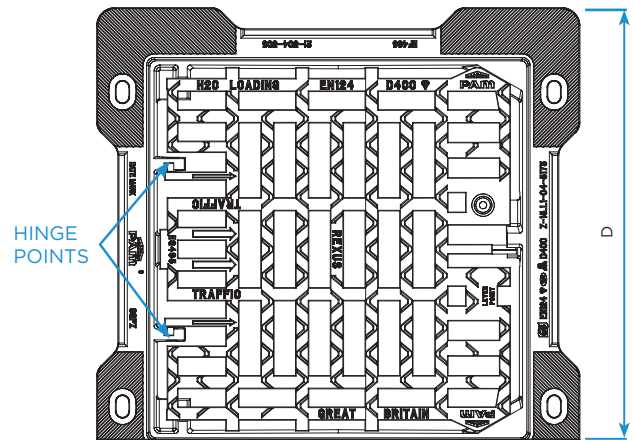

Right hand version shown product code 211607

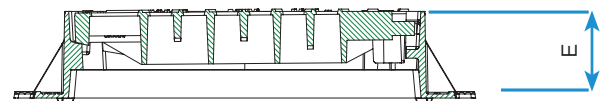

Grating and frame components are coated in a VOC free water based cationic bituminous emulsion that is classified as non-hazardous and non-toxic when dried.

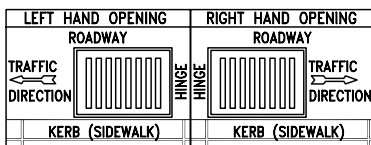

For further information of any products or services offered by Saint-Gobain Pam UK, please visit www.pamline.co.uk, email us at pamsales@saint-gobain.com or call **+44 (0)115 989 8903**

The information on this sketch is, to the best of our knowledge correct at the time of printing. However, Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT

This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request.