



Te con junta Express (brida orientable) DN60-300

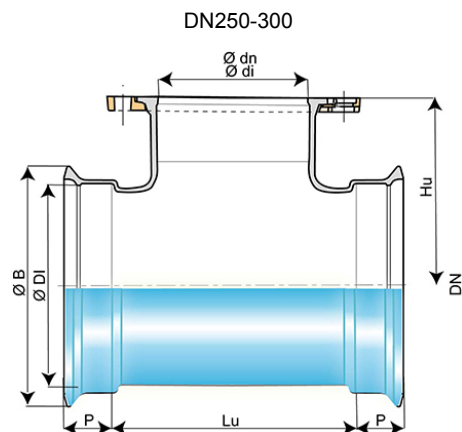

DN	Ø dn	Lu	Hu	P	Ø DI	Ø B	Peso PN10	Peso PN16	Peso PN25	Referencias PN10	Referencias PN16	Referencias PN25
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg			
60	40	154	141	76	80.3	143.5	8.7	8.7	8.7	NEA60UD1ANN2	NEA60UD1ANN2	NEA60UD1ANN2
60	60	154	161	76	80.3	143.5	9.1	9.1	9.6	NEA60UD1CNN2	NEA60UD1CNN2	NEA60UD3CNN2
60	65	154	161	76	80.3	143.5	11.2	11.2	11.2	NEA60UD1DNN2	NEA60UD1DNN2	NEA60UD3DNN2
80	40	145	149	79	101.4	167.5	10.5	10.5	10.5	NEA80UD1ANN2	NEA80UD1ANN2	NEA80UD1ANN2
80	60	145	169	79	101.4	167.5	10.8	10.8	11.4	NEA80UD1CNN2	NEA80UD1CNN2	NEA80UD3CNN2
80	65	145	174	79	101.4	167.5	11.6	11.6	11.8	NEA80UD1DNN2	NEA80UD1DNN2	NEA80UD3DNN2
80	80	183	165	79	101.4	167.5	12.2	12.2	12.2	NEA80UD1ENN2	NEA80UD1ENN2	NEA80UD1ENN2
100	40	150	161	80	121.4	187.5	11.7	11.7	11.7	NEB10UD1ANN2	NEB10UD1ANN2	NEB10UD1ANN2
100	60	150	181	80	121.4	187.5	12.1	12.1	12.2	NEB10UD1CNN2	NEB10UD1CNN2	NEB10UD3CNN2
100	65	150	186	80	121.4	187.5	10.8	10.8	11.0	NEB10UD1DNN2	NEB10UD1DNN2	NEB10UD3DNN2
100	80	185	177	80	121.4	187.5	11.0	11.0	11.0	NEB10UD1ENN2	NEB10UD1ENN2	NEB10UD1ENN2
100	100	210	180	80	121.4	187.5	12.9	12.9	14.2	NEB10UD1FNN2	NEB10UD1FNN2	NEB10UD3FNN2
125	40	150	164	83	147.4	214.5	13.2	13.2	13.2	NEB12UD1ANN2	NEB12UD1ANN2	NEB12UD1ANN2
125	60	150	184	83	147.4	214.5	13.3	13.3	13.4	NEB12UD1CNN2	NEB12UD1CNN2	NEB12UD3CNN2
125	65	150	184	83	147.4	214.5	13.4	13.4	13.5	NEB12UD1DNN2	NEB12UD1DNN2	NEB12UD3DNN2
125	80	165	195	83	147.4	214.5	14.3	14.3	14.3	NEB12UD1ENN2	NEB12UD1ENN2	NEB12UD1ENN2
125	100	190	200	83	147.4	214.5	15.6	15.6	16.3	NEB12UD1FNN2	NEB12UD1FNN2	NEB12UD3FNN2
125	125	267	200	83	147.4	214.5	18.4	18.4	20.4	NEB12UD1GNN2	NEB12UD1GNN2	NEB12UD3GNN2
150	40	154	176	86	173.4	241.5	16.3	16.3	16.3	NEB15UD1ANN2	NEB15UD1ANN2	NEB15UD1ANN2
150	60	154	196	86	173.4	241.5	16.5	16.5	18.8	NEB15UD1CNN2	NEB15UD1CNN2	NEB15UD3CNN2
150	65	154	201	86	173.4	241.5	16.6	16.6	18.6	NEB15UD1DNN2	NEB15UD1DNN2	NEB15UD3DNN2
150	80	165	210	86	173.4	241.5	17.5	17.5	17.5	NEB15UD1ENN2	NEB15UD1ENN2	NEB15UD1ENN2
150	100	190	215	86	173.4	241.5	18.8	18.8	21.7	NEB15UD1FNN2	NEB15UD1FNN2	NEB15UD3FNN2
150	125	220	210	86	173.4	241.5	20.5	20.5	24.7	NEB15UD1GNN2	NEB15UD1GNN2	NEB15UD3GNN2
150	150	305	220	86	173.4	241.5	24.1	24.1	34.0	NEB15UD1JNN2	NEB15UD1JNN2	NEB15UD3JNN2
200	40	159	209	92	225.5	294.5	22.9	22.9	22.9	NEB20UD1ANN2	NEB20UD1ANN2	NEB20UD1ANN2
200	60	159	229	92	225.5	294.5	23.0	23.0	24.6	NEB20UD1CNN2	NEB20UD1CNN2	NEB20UD3CNN2
200	65	159	234	92	225.5	294.5	23.1	23.1	25.3	NEB20UD1DNN2	NEB20UD1DNN2	NEB20UD3DNN2
200	80	170	240	92	225.5	294.5	24.1	24.1	24.1	NEB20UD1ENN2	NEB20UD1ENN2	NEB20UD1ENN2

NATURAL
AGUA POTABLE
DN 60 a 300

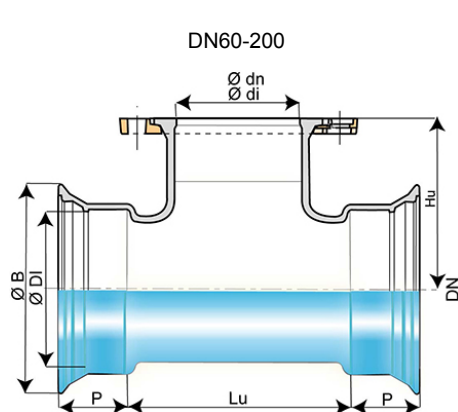

11/02/2021

ETGRE30EXP250

DN	Ø dn	Lu	Hu	P	Ø DI	Ø B	Peso PN10	Peso PN16	Peso PN25	Referencias PN10	Referencias PN16	Referencias PN25
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg			
200	100	195	245	92	225.5	294.5	25.6	25.6	28.7	NEB20UD1FNN2	NEB20UD1FNN2	NEB20UD3FNN2
200	125	220	240	92	225.5	294.5	27.4	27.4	31.5	NEB20UD1GNN2	NEB20UD1GNN2	NEB20UD3GNN2
200	150	250	245	92	225.5	294.5	29.5	29.5	34.7	NEB20UD1JNN2	NEB20UD1JNN2	NEB20UD3JNN2
200	200	360	260	92	225.5	294.5	36.8	36.8	44.2	NEB20UD1KNN2	NEB20UD2KNN2	NEB20UD3KNN2
250	60	165	260	100	277.8	351.1	27.9	27.9	37.7	NEB25UD1CNN2	NEB25UD1CNN2	NEB25UD3CNN2
250	65	164	272	100	276.8	351	37.7	37.7	39.9	NEB25UD1DNN2	NEB25UD1DNN2	NEB25UD3DNN2
250	80	234	250	100	276.8	351	27.8	27.8	27.8	NEB25UD1ENN2	NEB25UD1ENN2	NEB25UD1ENN2
250	100	200	274	100	276.8	351.0	44.0	44.0	45.2	NEB25UV1FNN2	NEB25UV1FNN2	NEB25UV3FNN2
250	150	235	280	100	277.8	351.1	39.4	39.4	46.5	NEB25UD1JNN2	NEB25UD1JNN2	NEB25UD3JNN2
250	200	290	290	100	277.8	351.1	47.4	47.6	48.9	NEB25UD1KNN2	NEB25UD2KNN2	NEB25UD3KNN2
250	250	350	300	100	277.8	351.1	56.2	56.2	58.9	NEB25UD1LNN2	NEB25UD2LNN2	NEB25UD3LNN2
300	60	237	297	105	328.8	408.2	41.1	41.1	56.8	NEB30UD1CNN2	NEB30UD1CNN2	NEB30UD3CNN2
300	65	237	297	105	328.8	408.2	56.9	56.9	-	NEB30UD1DNN2	NEB30UD1DNN2	consultamos
300	80	155	295	110	329.8	407.5	40.9	40.9	40.9	NEB30UD1ENN2	NEB30UD1ENN2	NEB30UD1ENN2
300	100	205	302	105	328.8	408.2	57.6	57.6	58.9	NEB30UV1FNN2	NEB30UV1FNN2	NEB30UV3FNN2
300	150	235	310	110	329.8	407.5	49.2	49.2	69.3	NEB30UD1JNN2	NEB30UD1JNN2	NEB30UD3JNN2
300	200	295	320	110	329.8	407.5	58.7	58.9	71.4	NEB30UD1KNN2	NEB30UD2KNN2	NEB30UD3KNN2
300	250	380	330	110	329.8	407.5	68.3	68.3	83.5	NEB30UD1LNN2	NEB30UD2LNN2	NEB30UD2LNN2
300	300	410	340	110	329.8	407.5	79.5	79.0	88.7	NEB30UD1MNN2	NEB30UD2MNN2	NEB30UD3MNN2

Campo de empleo:

- Para redes de abastecimiento de agua potable.

Características principales:

- Revestimiento exterior e interior: Aquacoat (AQB)
- En conformidad con las normas EN 545:2010 y ISO 2531:2009