
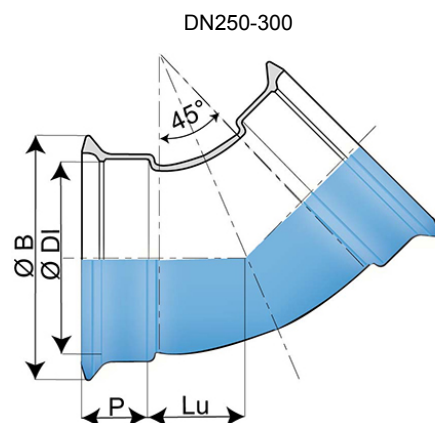


Codo 45° con junta Express DN60-300

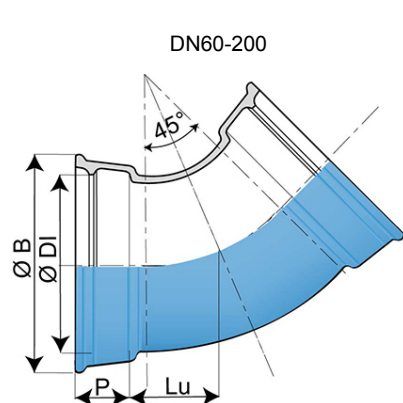

Ángulo	DN	Lu	P	Ø DI	Ø B	Peso	Referencias
grado	mm	mm	mm	mm	mm	kg	
45°	60	76.0	76	80.3	143.5	5.9	NEA60CB00NN2
45°	80	56.5	79	101.4	167.5	7.3	NEA80CB00NN2
45°	100	60.0	80	121.4	187.5	6.0	NEB10CB00NN2
45°	125	65.0	83	147.4	214.5	7.5	NEB12CB00NN2
45°	150	75.0	86	173.4	241.5	9.4	NEB15CB00NN2
45°	200	95.0	92	225.5	294.5	14.6	NEB20CB00NN2
45°	250	115.0	100	276.8	351.0	25.9	NEB25CB00NN2
45°	300	150.0	105	328.8	408.2	35.5	NEB30CB00NN2

Campo de empleo:

- Para redes de abastecimiento de agua potable.

Características principales:

- Revestimiento exterior e interior: Aquacoat (AQB)
- En conformidad con las normas EN 545:2010 y ISO 2531:2009