



## Kit Tubería Standard INTEGRAL PUX + Junta Standard

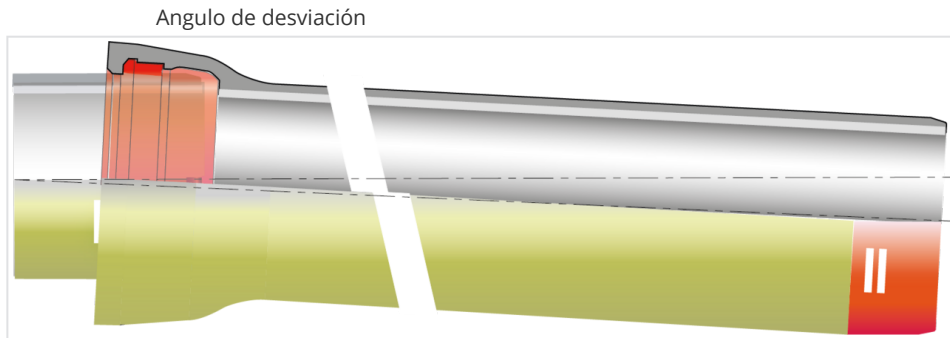

DN	Desviación angular	PFA	Referencias
150	5 °	40 bar	TSB15S60BH-E01
200	5 °	40 bar	TSB20S60BH-E01
250	5 °	38 bar	TSB25S60BH-E01
300	5 °	35 bar	TSB30S60BH-E01
350	4 °	32 bar	TSB35S60BH-E01
400	4 °	30 bar	TSB40S60BH-E01
450	4 °	29 bar	TSB45S60BH-E01
500	4 °	28 bar	TSB50S60BH-E01
600	4 °	26 bar	TSB60S60BH-E01
700	4 °	29 bar	TSB70E69BH-E01
800	4 °	28 bar	TSB80E69BH-E01
900	4 °	27 bar	TSB90E69BH-E01
1000	4 °	26 bar	TSC10E69BH-E01
1100	4 °	29 bar	TSC11N79BH-E01
1200	4 °	29 bar	TSC12N79BH-E01
1400	3 °	28 bar	TSC14N80BH-E01
1600	3 °	27 bar	TSC16N80BH-E01
1800	2,5 °	27 bar	TSC18N80BH-E01
2000	2 °	26 bar	TSC20N80BH-E01

## Productos vinculados

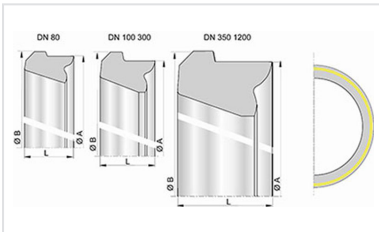

Junta de elastómero  
Standard Nitrilo DN80-2000