



QUICK GS - Versión simple DN60-300

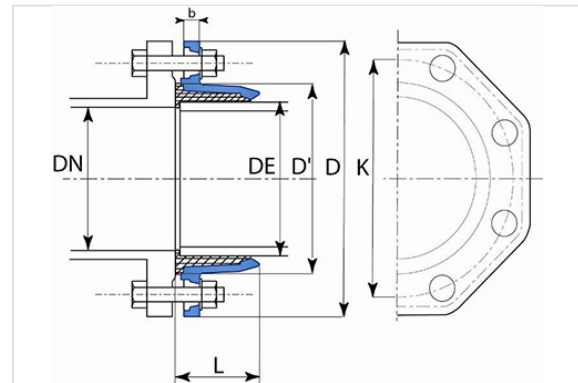

DN brida (mm)	ØDE (mm)	L (mm)	D (mm)	D' (mm)	b (mm)	K (mm)	Peso (kg)	Referencias
60-65	77	51	185	110	16	145	1,80	MAA60CACH
80	98	56	200	134,5	16	160	2,25	MAA80CACH
100	118	63	220	156	16	180	2,65	MAB10CACH
125	144	70	250	183	16	210	3,65	MAB12CACH
150	170	76	285	210	16	240	4,60	MAB15CACH
200	222	90	340	265	17	295	7,15	MAB20CACH
250	274	108	400	322	19	350 (PN10) - 355 (PN16)	10,90	MAB25CACH
300	326	117	455	373	20,5	400 (PN10) - 410 (PN16)	13,80	MAB30CACH

* DN200-250-300: brida multi-taladra ISO PN10 e ISO PN16

Materiales y revestimientos

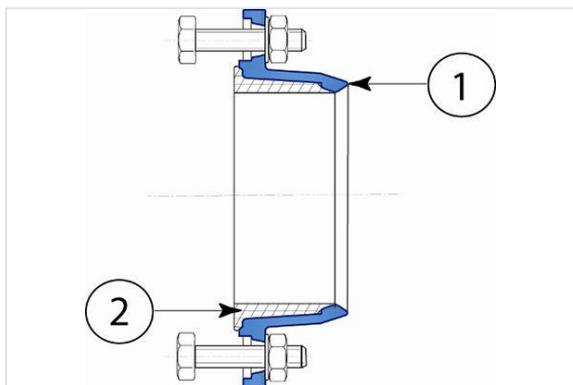

1. Contra-bridita: Fundición dúctil revestida de epoxi color azul espesor mínimo 250 micras de acuerdo con la norma EN 14901-1 (PECB)
2. Junta de estanqueidad: EPDM