
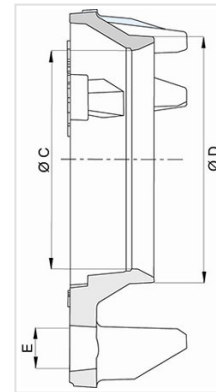


Contrabrida Express New DN60-250

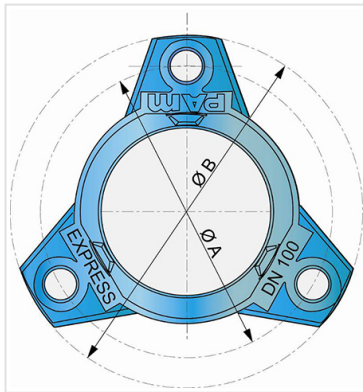

DN (mm)	ØA (mm)	ØB (mm)	ØC (mm)	ØD (mm)	E (mm)	Peso (kg)	Referencias
60	166	210	80	94,5	23,5	1,93	JTA60ANN2
80	190	234,5	102	116,5	23,5	1,98	JTA80ANN2
100	210	254	122	137	23,5	2,28	JTB10ANN2
125	236	280	148	166,5	23,5	3,00	JTB12ANN2
150	264	308	173,4	192,4	23,5	3,18	JTB15ANN2
200	318	364	226,3	247	23,5	5,30	JWB20VNN2
250	375	435	277,7	297,4	23,5	9,00	JWB25VNN2

Campo de empleo:

- Para redes de abastecimiento de agua potable.

Características principales:

- Revestimiento de la contrabrida: Aquacoat