



QUICK PVC et BLUTOP non verrouillé


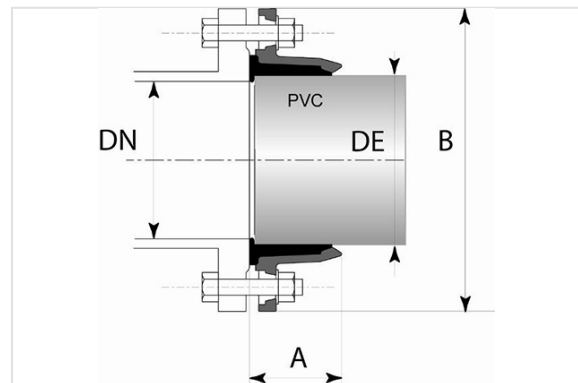


DN bride (mm)	DN/OD (mm)	ØDE (mm)	A (mm)	B (mm)	Masse (kg)	Référence
40	40	40	50	150	1,20	MAL40DACH
40/50	50	50	53	165	1,50	MAL50DACH
50	63	63	54	165	1,80	MAL60DACH
60/65	63	63	54	185	2,00	MAL65DACH
60/65	75	75	58	185	2,30	MAL75DACH
80	90	90	62	200	2,60	MAL90DACH
100	110	110	68	220	3,08	160754
125	125	125	73	250	4,06	160755
125	140	140	76	250	4,08	160756
150	160	160	82	285	5,20	160757
200	200	200	91	340	7,50	160758
200	225	225	93	340	7,10	160759

Note : Gamme BLUTOP pour DN75, 90, 110, 125 et 160

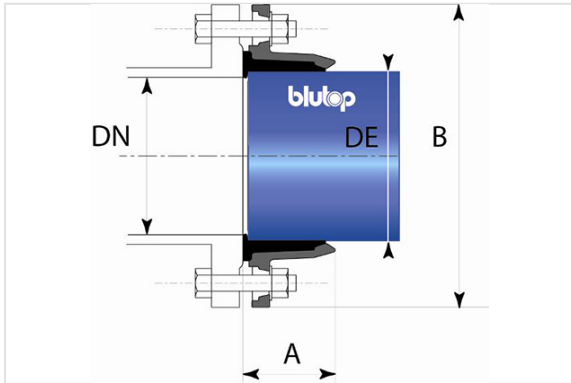

Matériaux et revêtements

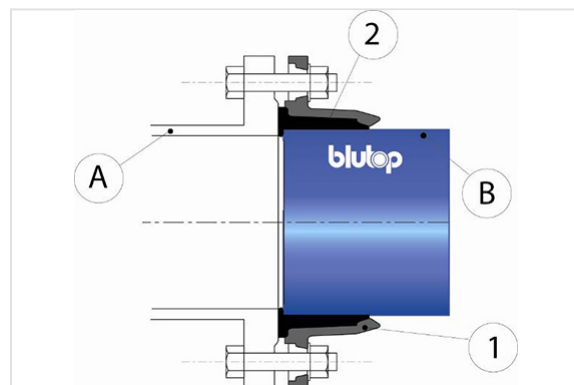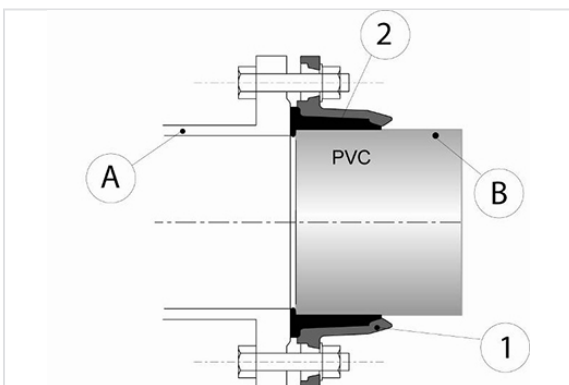

Item	Désignation	Matière	Revêtement
1	Contrebride	Fonte GS	Poudre époxy bleu 250 microns d'épaisseur moyenne avec un mini de 200 microns, conforme à la norme EN 14901-1 (PECB)
2	Garniture d'étanchéité	EPDM	
A	Vanne	Fonte GS	
B	Tuyau	PVC ou Fonte (BLUTOP)	

Marquage

