


Rondelles plates en acier galvanisé à chaud pour boulon de joint à bride

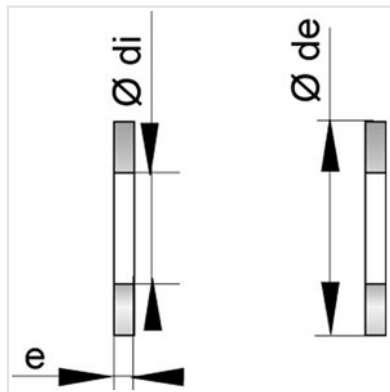

Type	Øde (mm)	Ødi (mm)	e (mm)	Masse (kg)	Référence
17 / 30 / 3	30	17	3	0,01	JXM16RGE
21 / 36 / 3	36	21	3	0,01	JXM20RGE
21 / 36 / 3	36	21	3	0,02	JXM20RGR
25 / 45 / 4	45	25	4	0,02	JXM24RGE
28 / 48 / 4	48	28	4	0,02	JXM27RGE
31 / 52 / 4	52	31	4	0,02	JXM30RGE
34 / 56 / 5	56	34	5	0,04	JXM33RGE
37 / 60 / 5	60	37	5	0,04	JXM36RGE
42 / 72 / 6	72	42	6	0,12	JXM39RGM
48 / 85 / 8	85	48	8	0,07	JXM45RGM
56 / 98 / 8	98	56	8	0,32	JXM52RGM
62 / 105 / 10	105	62	10	0,45	JXM56RGM

Rondelles par DN de brides

DN mm	PN10 Nb	Référence	PN16 Nb	Référence	PN25 Nb	Référence	PN40 Nb	Référence	PN63 Nb	Référence	PN100 Nb	Référence
40	8	JXM16RGE	8	JXM16RGE	8	JXM16RGE	8	JXM16RGE	16	16	16	16
50												
60												
65												
80	16	JXM20RGE	16	JXM20RGE	16	JXM20RGE	16	16	16	16	16	16
100												

DN mm	PN10 Nb	Référence	PN16 Nb	Référence	PN25 Nb	Référence	PN40 Nb	Référence	PN63 Nb	Référence	PN100 Nb	Référence
125								JXM24RGE		JXM27RGE		JXM30RGE
150				JXM20RGE		JXM24RGE		JXM24RGE		JXM30RGE		JXM30RGE
200					24		24	JXM27RGE	24	JXM33RGE	24	JXM33RGE
250	24	JXM20RGE	24			JXM27RGE		JXM30RGE		JXM33RGE		
300				JXM24RGE			32	JXM30RGE	32			
350					32							
400	32		32	JXM27RGE								
450		JXM24RGE				JXM33RGE						
500	40		40	JXM30RGE	40							
600												
700		JXM27RGE		JXM33RGE		JXM36RGE						
800	48		48		48							
900		JXM30RGE		JXM36RGE		JXM45RGM						
1000	56		56		56							
1100		JXM33RGE		JXM39RGM		JXM52RGM						
1200	64		64		64							
1400				JXM45RGM								
1500	72	JXM39RGM	72		72	JXM56RGM						
1600	80		80	JXM52RGM	80							
1800	88	JXM45RGM	88		88							
2000	96		96	JXM56RGM	96							