


TELECOM Duct cover T-MAX optimized C250 - Cover 578 x 468

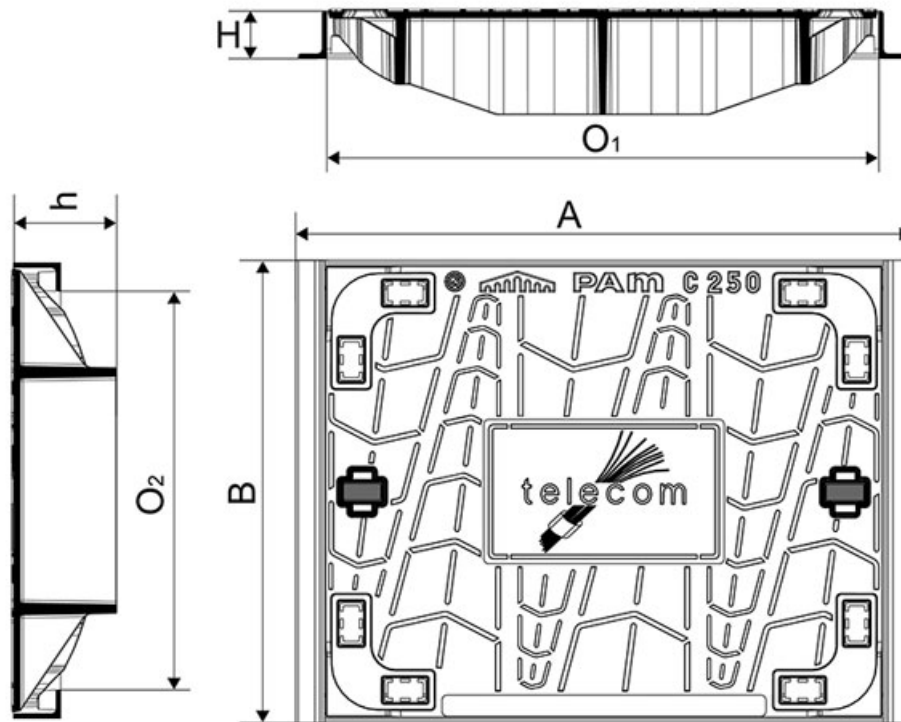

AxB (mm)	H (mm)	h (mm)	Cover mass (kg)	Packaging	References
578x468	45	109	22	60	DCL1LIGXTEL-T
578x468	45	109	22	60	DCL1LIGX-T

Material and coating:

- Cover in Ductile Iron EN GJS 400-15: water base

Field of application:

- C250 class (Group 3) according to standard EN 124-2, intended for the circulated pavements and similar locations subjected to the passage of vehicles.

Main characteristics:

- Covers with soundproofing pads.

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.