


Disassembling and reassembly of the DEDRA 600 grating D400 Class



Opening of the grating

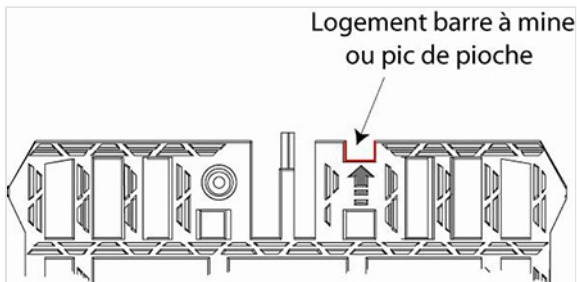


The DEDRA 600 gratings are unlocked with the help of a pickaxe or a crowbar in using the opening housing located on the grating and materialized by an arrow.

Disassembling and reassembly of the grating


DEDRA 600 GRATING
Removing and Fitting Instructions

Removing


1 - Releasing the spring bar lock

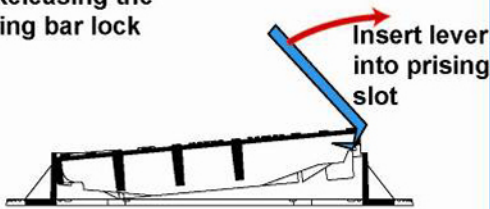

2 - Maintain the grating in the 90 degree open position




3 - The grating can now be lifted clear of the frame.




Replacing


1 - Maintain the grate in a vertical position at 90° to the top of the frame.

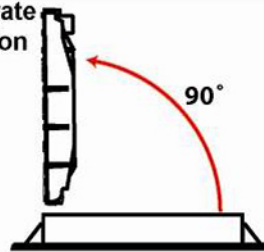

2 - Descend the grid vertically and engage the 2 points of hinge.

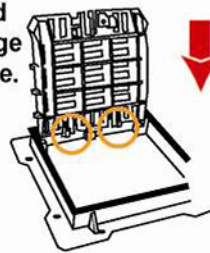

3 - Before closing check the grating is hinging freely, after closing check the spring bar lock has fully deployed.

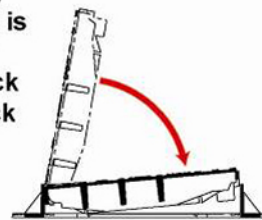

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.