


Double Socket Bend with 2 sockets STANDARD + 2 Standard G Gasket (STD G)

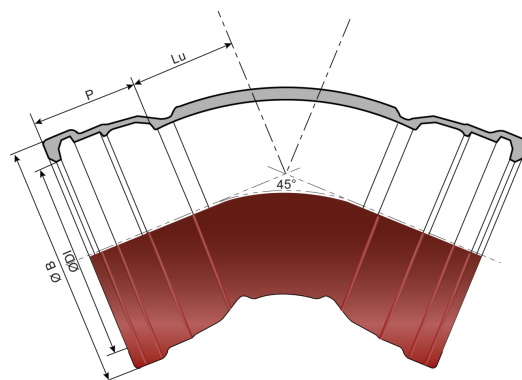

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
45°	150	93	100.5	173.8	215.5	10.50	TJB15CBS
22°30'	150	42	100.5	173.8	215.5	8.50	TJB15CDS
11°15'	150	46	100.5	173.8	215.5	8.70	TJB15CES
45°	200	100	106.5	225.6	269.3	15.80	TJB20CBS
22°30'	200	51	106.5	225.6	269.3	12.80	TJB20CDS
11°15'	200	52	106.5	225.6	269.3	12.90	TJB20CES

Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- STANDARD G Gasket (STD G) in Nitrile
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products



Standard G Gasket (STD G) for BIOGAN pipes and fittings DN150-200

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.