


PVC Connecting Piece (1 socket for ductile iron and 1 spigot for PVC)

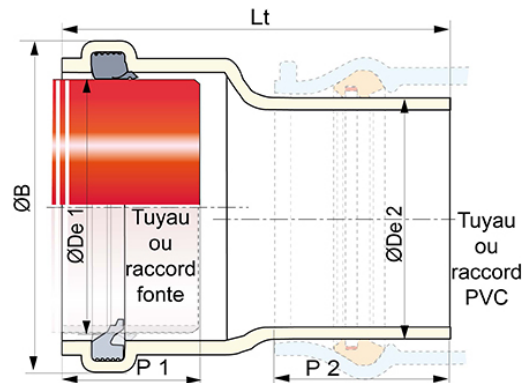

DN (mm)	Lt (mm)	ØDe1 maxi pour bout uni fonte (mm)	ØB (mm)	P1 (mm)	Ø DE for PVC spigot (mm)	ØDE2 maxi (mm)	P2 (mm)	Mass (kg)	References
150	220	171.7	207	90	160	161	100	1.05	TJM16NDOJ
200	243	223.7	262	90	200	201	108	1.69	TJB20NDOK
300	310	327.2	362	100	315	316	160	3.96	TJM31NDOM

Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

Main characteristics:

- Body in PVC
- IM Gasket in Nitrile
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Mark NF
- Declaration of performances
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works

- CCTG: Fascicule 70 (sewage work)

Linked products



IM Seal for gravity fittings

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.