


Alpinal Blank Flange 2" Gas

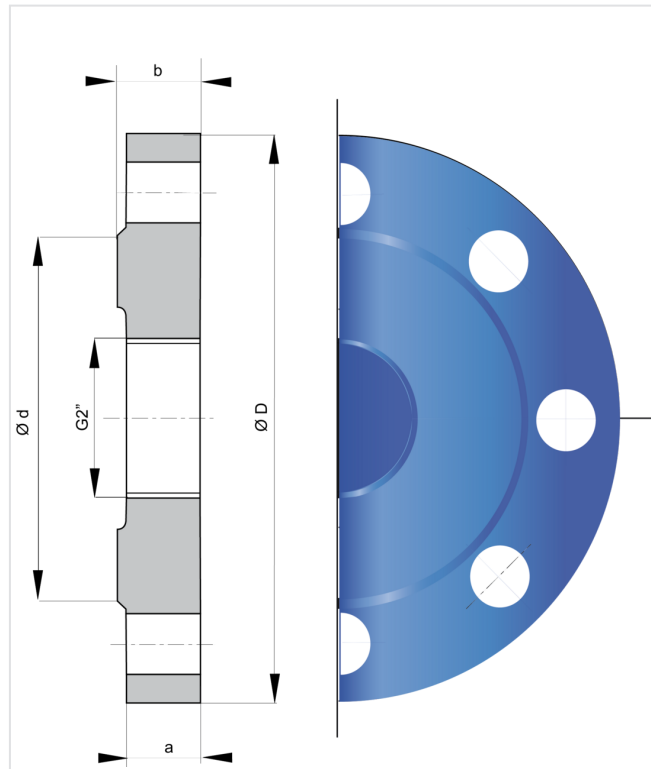

DN (mm)	$\varnothing D$	a	b	$\varnothing d$	Number of holes	PN 40		PN 63	
						Mass (kg)	References	Mass (kg)	References
400	670 mm	65 mm	69 mm	535 mm	16			176.00 kg	ABB40QL5LTT
500	755 mm	52 mm	56 mm	615 mm	20	174.00 kg	BBB50QL4LTT		
500	800 mm	75 mm	79 mm	640 mm	20			278.00 kg	ABB50QL5LTT


Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

Linked products

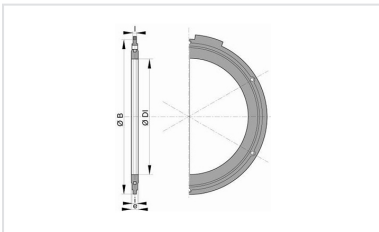

Flanged joint with hot galvanised steel bolts, nuts and washers for ALPINAL

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.