


ALPINAL Socket-Spigot threaded 2" Gas DN150-300

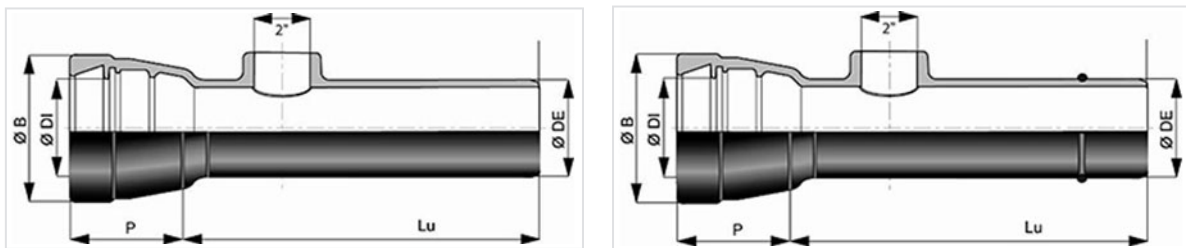

| DN | Lu | Ø DE | P | Ø DI | Ø B | Mass | References |
|--------|--------|--------|--------|----------|----------|----------|------------|
| 150 mm | 600 mm | 170 mm | 148 mm | 172.5 mm | 229.8 mm | 30.00 kg | ANB15EU |

Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- Internal lining : spun mortar cement
- External coating : metallic zinc (200g/m²) metallic zinc (200 g/m²) covered by a layer of black synthetic resin
- The pipes are supplied with a plug at each end
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

Linked products



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Vi Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.