


## Alpinal Universal Tyton Flanged Socket DN80-250

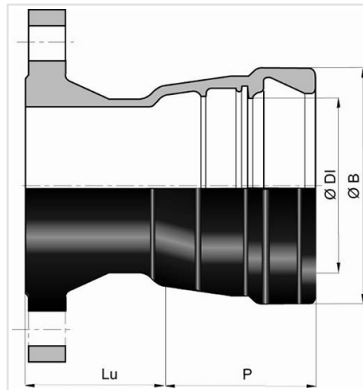

DN	PN	Lu	P	Ø B	Ø DI	Mass	References
100 mm	63	130 mm	139 mm	177 mm	120.5 mm	20.30 kg	ANB10BE5
100 mm	100	130 mm	139 mm	177 mm	120.5 mm	14.30 kg	ANB10BEB
200 mm	40	140 mm	154 mm	290 mm	224.5 mm	38.00 kg	ANB20BE4
200 mm	100	140 mm	154 mm	290 mm	224.5 mm	63.00 kg	ANB20BEB
250 mm	40	145 mm	160.6 mm	347 mm	276.5 mm	56.00 kg	ANB25BE4

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- Internal lining: cement mortar
- External coating: bituminous paint
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

## Linked products



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Joint



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Vi Joint



Kit ALPINAL Universal  
Tyton Fitting PECB +  
Universal Tyton Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*