


Bend 11°15 (1/32) (PECB) with 2 Rotatable Flanges

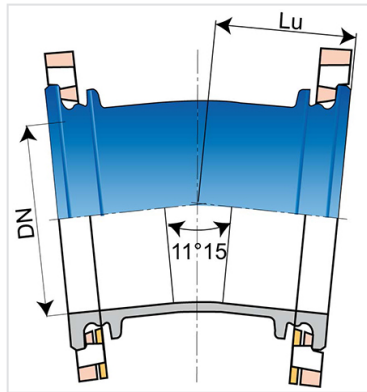

Angle	DN (mm)	Lu (mm)	PN 10		PN 16		PN 25	
			Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
11°15	40	99	5.60	BAA40CE10TT	5.60	BAA40CE10TT	5.60	BAA40CE10TT
11°15	50	109	6.60	BAA50CE10TT	6.60	BAA50CE10TT	6.60	BAA50CE10TT
11°15	60	119	7.40	BAA60CE10TT	7.40	BAA60CE10TT		
11°15	65	119	8.56	BAA65CE10TT	8.56	BAA65CE10TT		
11°15	80	113	9.60	BAA80CE10TT	9.60	BAA80CE10TT	9.60	BAA80CE10TT
11°15	100	115	11.30	BAB10CE10TT	11.30	BAB10CE10TT	12.30	BAB10CE30TT
11°15	125	111	14.40	BAB12CE10TT	14.40	BAB12CE10TT	16.20	BAB12CE30TT
11°15	150	113	18.50	BAB15CE10TT	18.50	BAB15CE10TT	20.50	BAB15CE30TT
11°15	200	132	27.00	BAB20CE10TT	27.00	BAB20CE20TT	27.00	BAB20CE30TT
11°15	250	150	29.90	BAB25CE10TT2	29.90	BAB25CE20TT2	33.30	BAB25CE30TT2
11°15	300	159	40.00	BAB30CE10TT2	39.50	BAB30CE20TT2	43.30	BAB30CE30TT2
11°15	350	174	67.41	BAB35CE10TT2	69.72	BAB35CE20TT2	81.48	BAB35CE30TT2
11°15	400	187			91.90	BAB40CE20TT2		
11°15	450	201	102.59	BAB45CE10TT2	112.67	BAB45CE20TT2		
11°15	500	232.5	131.00	BAB50CE10TT	157.00	BAB50CE20TT		
11°15	600	252.5			233.42	BAB60CE20TT2	239.72	BAB60CE30TT2

Field of use:

- For drinking water networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.