
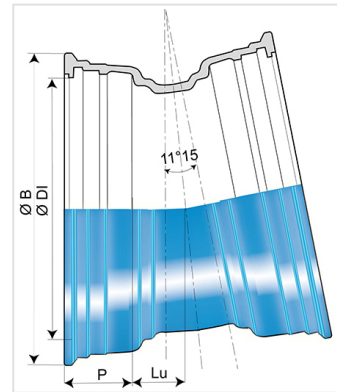


Bend 11°15 (1/32) (PECB) with 2 sockets STANDARD

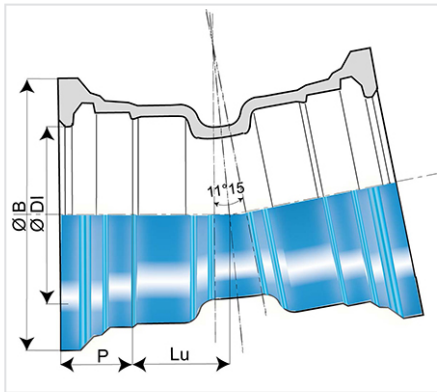

| Angle | DN (mm) | Lu (mm) | P (mm) | ØDI (mm) | ØB (mm) | Mass (kg) | References |
|-------|---------|---------|--------|----------|---------|-----------|--------------|
| 11°15 | 60 | 35 | 82 | 80.2 | 143.5 | 5.10 | SSA60CE00TT |
| 11°15 | 80 | 40 | 85 | 101.4 | 167.5 | 6.50 | SSA80CE00TT |
| 11°15 | 100 | 40 | 88 | 121.4 | 187.5 | 7.90 | SSB10CE00TT |
| 11°15 | 125 | 45 | 91 | 147.4 | 214.5 | 10.30 | SSB12CE00TT |
| 11°15 | 150 | 46 | 94 | 173.4 | 241 | 12.60 | SSB15CE00TT |
| 11°15 | 200 | 52 | 100 | 225.5 | 294 | 19.20 | SSB20CE00TT |
| 11°15 | 250 | 55 | 105 | 277.3 | 351 | 30.50 | SSB25CE00TT |
| 11°15 | 300 | 50 | 110 | 329.3 | 408.3 | 39.70 | SSB30CE00TT |
| 11°15 | 350 | 50 | 110 | 381.9 | 464.3 | 40.64 | SSB35CE00TT2 |
| 11°15 | 400 | 49 | 112 | 432.9 | 515.3 | 50.70 | SSB40CE00TT2 |
| 11°15 | 450 | 65 | 115.5 | 484 | 573 | 65.31 | SSB45CE00TT2 |
| 11°15 | 500 | 60 | 117.5 | 536 | 628 | 74.76 | SSB50CE00TT2 |
| 11°15 | 600 | 70 | 132.5 | 639.1 | 737 | 106.37 | SSB60CE00TT2 |
| 11°15 | 700 | 87 | 150 | 742.2 | 863 | 197.00 | SSB70CE00TT |
| 11°15 | 800 | 90.5 | 160 | 846.3 | 974 | 253.40 | SSB80CE00TT |
| 11°15 | 900 | 102.5 | 175 | 949.4 | 1082 | 325.60 | SSB90CE00TT |
| 11°15 | 1000 | 117.5 | 185 | 1052.5 | 1191 | 418.00 | SSC10CE00TT |
| 11°15 | 1100 | 140 | 190 | 1155 | 1300 | 490.00 | SSC11CE00TT |
| 11°15 | 1200 | 137.5 | 195 | 1263 | 1412.5 | 478.00 | SSC12CE00TT |
| 11°15 | 1400 | 143 | 255 | 1467 | 1600 | 884.00 | SSC14CE00TT |
| 11°15 | 1500 | 193 | 280 | 1570 | 1742 | 1143.00 | SSC15CE00TT |
| 11°15 | 1600 | 153 | 275 | 1673 | 1820 | 1173.00 | SSC16CE00TT |

| Angle | DN (mm) | Lu (mm) | P (mm) | ØDI (mm) | ØB (mm) | Mass (kg) | References |
|-------|---------|---------|--------|----------|---------|-----------|-------------|
| 11°15 | 1800 | 200 | 258 | 1881.7 | 2038.2 | 1542.00 | SSC18CE00TT |
| 11°15 | 2000 | 200 | 290 | 2089 | 2269 | 2151.00 | SSC20CE00TT |


Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009


Linked products

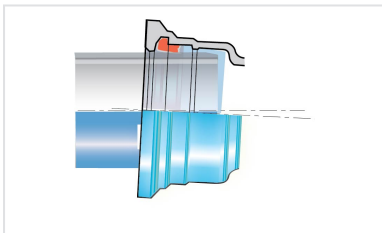


Kit Standard Bend PECB +
Standard Gasket

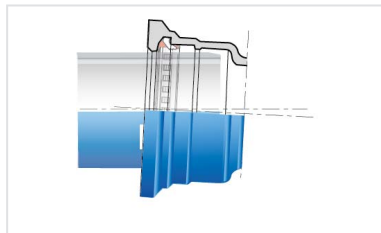

Kit Standard Fitting PECB +
Standard Vi Gasket

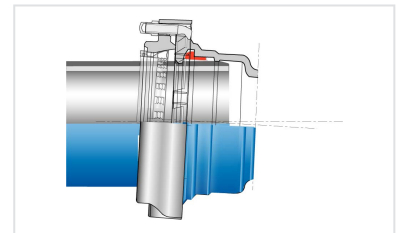

Kit Standard Fitting PECB +
Standard V+i Joint

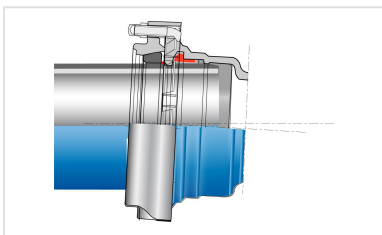

Kit Standard Fitting PECB +
Standard Ve Joint



NATURAL SUPPLY, TREATMENT AND DISTRIBUTION DN 60 - 2000

01/06/2026
WARSF21STD364

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.