


Bend 11°15 (1/32) INTEGRAL with 2 Fixed Flanges

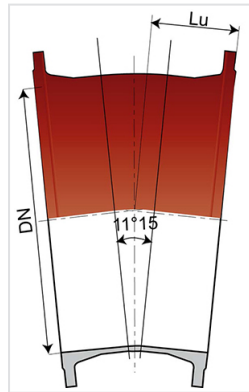

Angle	DN (mm)	Lu (mm)	PN 10		PN 16		PN 25		PN 40	
			Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
11°15	80	113	8.80	BBA80CE10FF	8.80	BBA80CE10FF	8.80	BBA80CE10FF	8.80	BBA80CE10FF
11°15	100	115	10.90	BBB10CE10FF	10.90	BBB10CE10FF				
11°15	150	113	16.50	BBB15CE10FF	16.50	BBB15CE10FF				
11°15	200	132			25.60	BBB20CE20FF				
11°15	250	165			36.70	BBB25CE20FF				
11°15	300	175			49.80	BBB30CE20FF				
11°15	350	190			83.50	BBB35CE20FF				
11°15	400	205			108.00	BBB40CE20FF				
11°15	450	349			135.00	BBB45CE20FF				
11°15	500	375			177.00	BBB50CE20FF				
11°15	600	426			268.00	BBB60CE20FF				
11°15	700	230	227.00	BBB70CE10FF	223.00	BBB70CE20FF				
11°15	800	255	290.00	BBB80CE10FF	286.00	BBB80CE20FF				
11°15	900	280	368.00	BBB90CE10FF	363.00	BBB90CE20FF				
11°15	1000	310	488.00	BBC10CE10FF						
11°15	1400	403	996.00	BBC14CE10FF	1100.00	BBC14CE20FF				
11°15	1600	433	1363.00	BBC16CE10FF						


Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13


Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

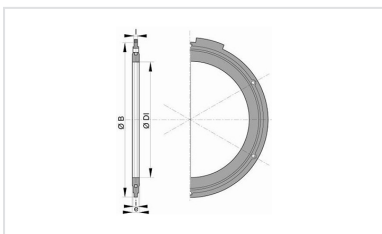

Flanged joint with hot galvanized steel bolts, nuts and washers for sewage

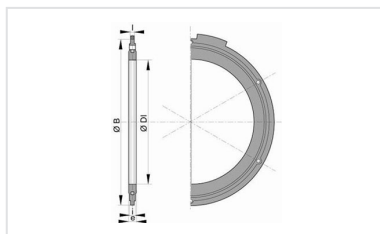

Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.