


Bend 11°15 (1/32) ISOPAM with 2 sockets STANDARD

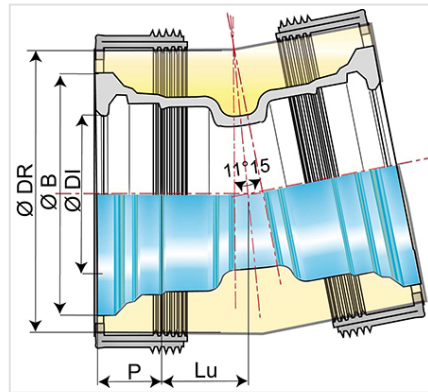

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	ØDR (mm)	Mass (kg)	References
11°15	100	40	88	121.4	187.5	200	11.70	YSB10CE
11°15	125	45	91	147.4	214.5	225	15.10	YSB12CE
11°15	150	46	94	173.4	241	250	17.90	YSB15CE
11°15	200	52	100	225.5	294	315	32.70	YSB20CE
11°15	300	55	110	329.3	408.3	450	41.00	YSB25CE


Field of use:

- Pre-insulated fittings for frost protection


Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB)
- EN 545
- Fittings equipped with thermal insulation (polyethylene sleeve, polyurethane foam, foam spacer, elastomer sleeve) to protect networks exposed to risks of freezing

Linked products

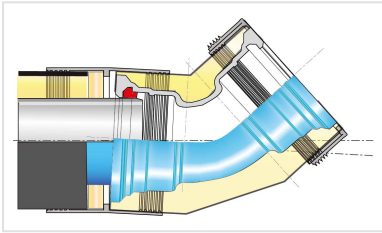

Kit ISOPAM Fitting +
Standard Gasket

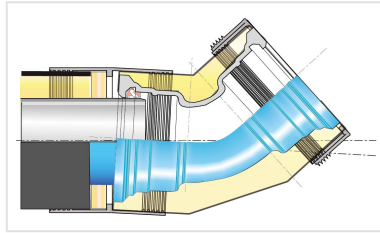

Kit ISOPAM Fitting +
Standard Vi Gasket

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.