


Bend 22°30 (1/16) (PECB) with 2 sockets STANDARD PAMLOCK

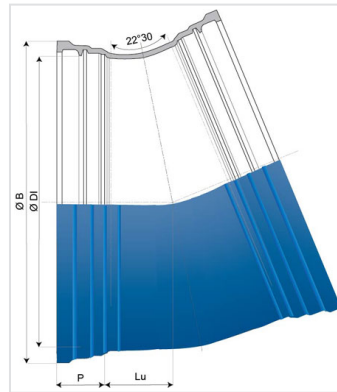

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	1400	264	300	1467.1	1633.7	1155.00	SPC14CD00TT
22°30	1500	397	322	1570.3	1759.3	1630.00	SPC15CD00TT
22°30	1600	284	325	1673.4	1870.4	1705.00	SPC16CD00TT
22°30	1800	425	350	1880.7	2075.3	2616.00	SPC18CD00TT
22°30	2000	418.5	394	2088	2313	3332.00	SPC20CD00TT


Field of use:

- For drinking water and irrigation networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

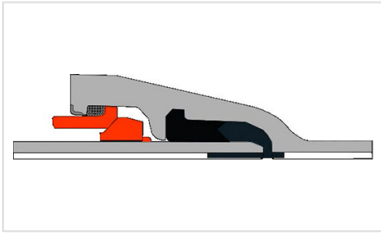

Kit PAMLOCK Fitting PECB +
PAMLOCK Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.