
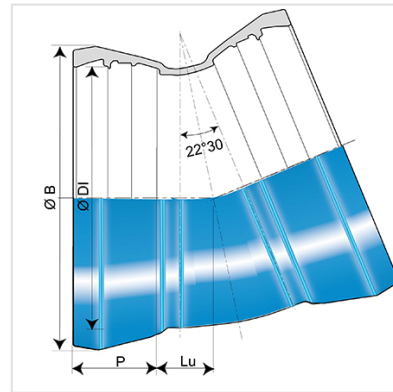


Bend 22°30 (1/16) (PECB) with 2 sockets UNIVERSAL STANDARD

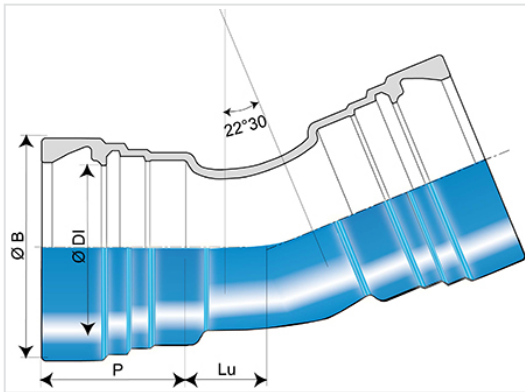

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	80	38.3	120	101.4	149	14.80	SFA80CD00TT
22°30	100	42.9	142	121.4	177	17.10	SFB10CD00TT
22°30	150	54.3	150	173.4	230	25.60	SFB15CD00TT
22°30	200	65.8	158	225.5	290	36.70	SFB20CD00TT
22°30	250	77.2	166	276.8	347	50.40	SFB25CD00TT
22°30	300	88.7	178	328.8	406	71.50	SFB30CD00TT
22°30	400	110	176	432	512	97.80	SFB40CD00TT
22°30	500	130	200	535	626	161.00	SFB50CD00TT
22°30	600	150	209	638	742	222.00	SFB60CD00TT
22°30	700	157.5	256	740.5	857	400.00	SFB70CD00TT
22°30	800	170	261	845.8	983.8	550.00	SFB80CD00TT
22°30	900	220	275	948.9	1093	770.00	SFB90CD00TT
22°30	1000	240	272.5	1052	1216	899.00	SFC10CD00TT
22°30	1100	285	284	1157.1	1311.5	1110.00	SFC11CD00TT
22°30	1200	285	279.5	1260	1419.6	1116.00	SFC12CD00TT
22°30	1400	264	330	1468.5	1650.1	1600.00	SFC14CD00TT


Field of use:

- To use under high to very high pressures


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

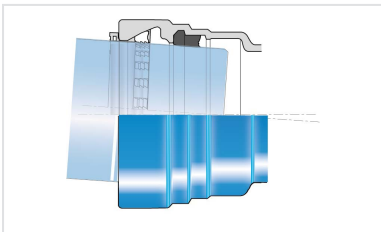

Kit Universal Standard
Fitting PECB + Universal
Standard Vi Joint

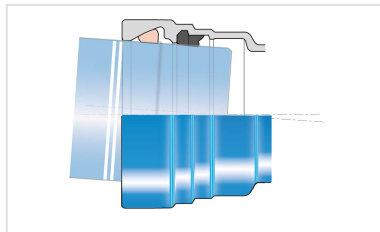

Kit Universal Standard
Fitting PECB + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.