


## Bend 22°30 (1/16) INTEGRAL with 2 sockets STANDARD

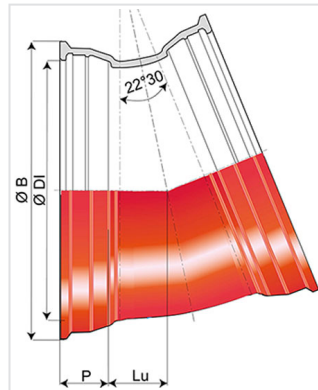

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	1100	275	190	1155	1300	650.00	SSC11CD00FF
22°30	1200	258.5	195	1263	1412.5	644.00	SSC12CD00FF
22°30	1400	264	255	1467	1600	1107.00	SSC14CD00FF
22°30	1500	314	280	1570	1742	1367.00	SSC15CD00FF
22°30	1600	284	275	1673	1820	1479.00	SSC16CD00FF
22°30	1800	337	258	1881.7	2038.2	2070.00	SSC18CD00FF
22°30	2000	355	290	2089	2269	2668.00	SSC20CD00FF

### Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

### Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects
  - NF EN 1610: Reception of the works
  - CCTG: Fascicule 70 (sewage work)

## Linked products

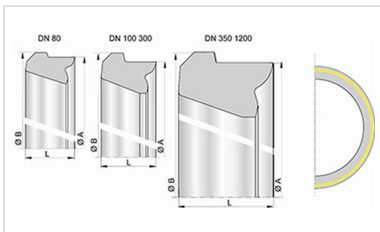

Nitrile STD Gasket  
DN80-2000

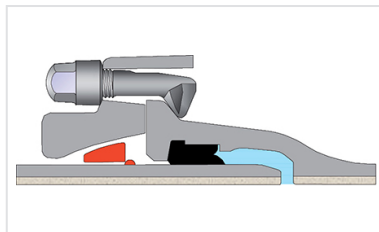

STD Ve joint for INTEGRAL  
STD Fittings

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*