


Bend 30° (1/12) (PECB) with 2 sockets STANDARD

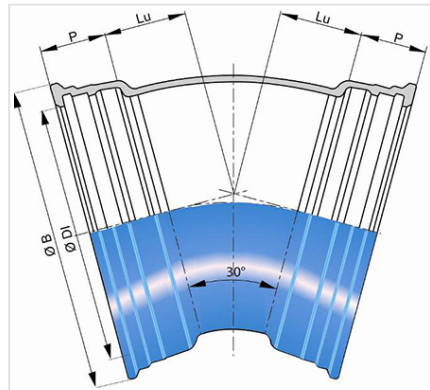

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
30°	400	140	112	432.4	515.3	70.80	SSB40CC00TT
30°	500	170	117.5	535.5	628	88.20	SSB50CC00TT
30°	600	202.5	132.5	638.6	737	125.00	SSB60CC00TT


Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009


Linked products

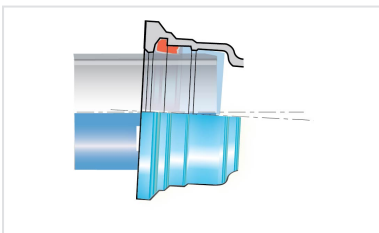


Kit Standard Bend PECB +
Standard Gasket

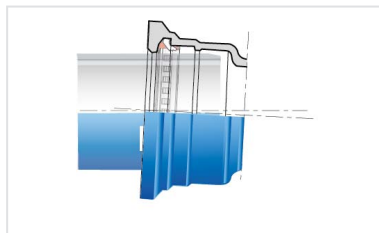

Kit Standard Fitting PECB +
Standard Vi Gasket

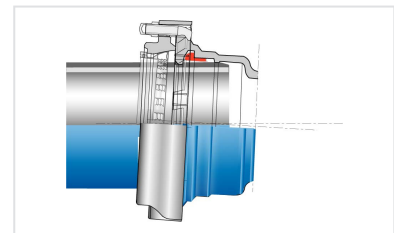

Kit Standard Fitting PECB +
Standard V+i Joint

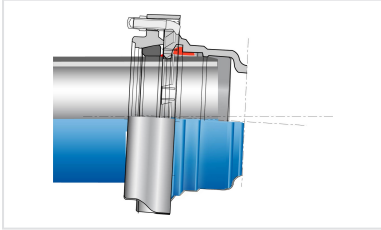

Kit Standard Fitting PECB +
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.