


Bend 45° (1/8) (PECB) with 2 Rotatable Flanges

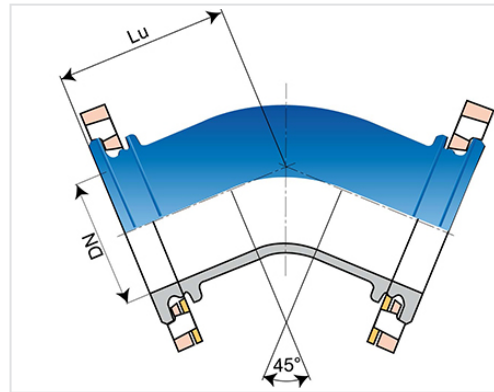

Angle	DN (mm)	Lu (mm)	PN 10		PN 16		PN 25		PN 40	
			Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
45°	50	150	7.60	BAA50CB10TT	7.60	BAA50CB10TT	7.60	BAA50CB10TT	7.60	BAA50CB10TT
45°	60	160	8.30	BAA60CB10TT	8.30	BAA60CB10TT	7.50	BAA60CB30TT	7.50	BAA60CB30TT
45°	65	160	9.30	BAA65CB10TT	9.30	BAA65CB10TT	9.50	BAA65CB30TT	9.50	BAA65CB30TT
45°	80	130	10.00	BAA80CB10TT	10.00	BAA80CB10TT	10.00	BAA80CB10TT	10.00	BAA80CB10TT
45°	100	140	12.10	BAB10CB10TT	12.10	BAB10CB10TT	13.60	BAB10CB30TT	13.60	BAB10CB30TT
45°	125	150	16.20	BAB12CB10TT	16.20	BAB12CB10TT	18.00	BAB12CB30TT	18.00	BAB12CB30TT
45°	150	160	21.00	BAB15CB10TT	21.00	BAB15CB10TT	23.00	BAB15CB30TT	23.00	BAB15CB30TT
45°	200	180	31.00	BAB20CB10TT	31.00	BAB20CB20TT	33.40	BAB20CB30TT		
45°	250	245	45.30	BAB25CB10TT2	45.30	BAB25CB20TT2	50.50	BAB25CB30TT2		
45°	300	275	62.20	BAB30CB10TT2	61.20	BAB30CB20TT2	68.80	BAB30CB30TT2		
45°	350	279.2	82.90	BAB35CB10TT2	85.10	BAB35CB20TT2	96.30	BAB35CB30TT2		
45°	400	304	110.88	BAB40CB10TT2	120.33	BAB40CB20TT2	139.29	BAB40CB30TT2		
45°	450	329	128.84	BAB45CB10TT2	138.92	BAB45CB20TT2	159.29	BAB45CB30TT2		
45°	500	352.5	172.10	BAB50CB10TT2	199.40	BAB50CB20TT2	210.10	BAB50CB30TT2		
45°	600	401	244.76	BAB60CB10TT2	297.30	BAB60CB20TT2	366.76	BAB60CB30TT2		


Field of use:

- For drinking water networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

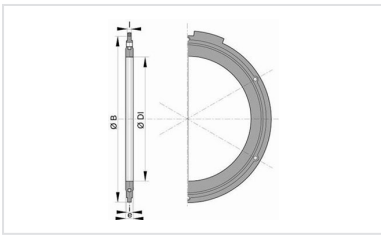

Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.