


Bend 45° (1/8) PUR PUX with 2 Fixed Flanges

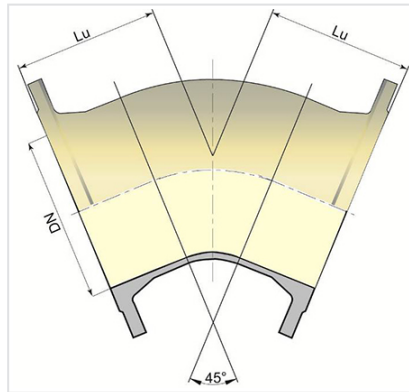

Angle	DN (mm)	Lu (mm)	PN 10		PN 16	
			Mass (kg)	References	Mass (kg)	References
45°	1200	746	1116.00	BBC12CB10UU	1171.00	BBC12CB20UU
45°	1400	782	1667.00	BBC14CB10UU		
45°	1500	782	1774.00	BBC15CB10UU	1950.00	BBC15CB20UU

Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating : polyurethane coating in accordance with Standard EN 15655
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.