


Bend 45° (1/8) PUR PUX with 2 sockets STANDARD

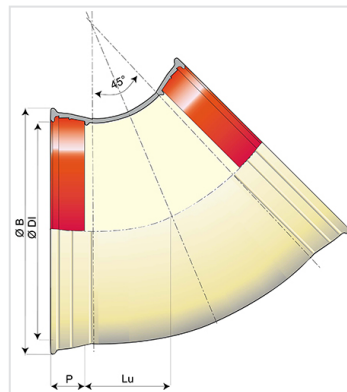

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
45°	1200	537.5	195	1263	1412.5	1015.00	SSC12CB00UU
45°	1400	522	255	1467	1600	1555.00	SSC14CB00UU
45°	1500	572	280	1570	1742	1815.00	SSC15CB00UU
45°	1600	563	275	1673	1820	2089.00	SSC16CB00UU

Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Standard gasket for Pipes and Fittings DN60-2000

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.