


Kit Universal Standard Ve TT PE Pipe + Universal Standard Ve Joint

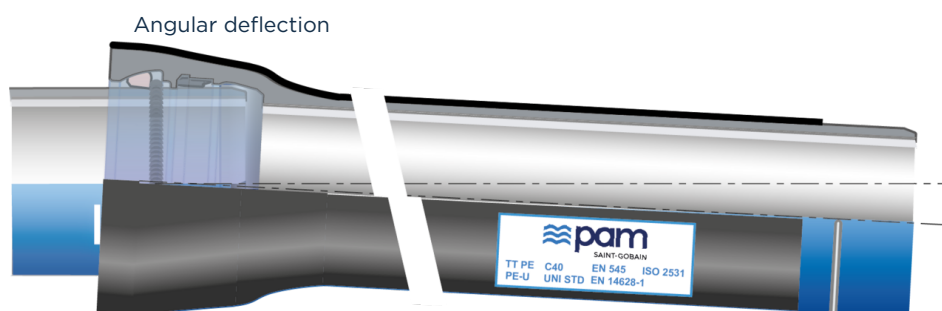


DN	Class	Angular deflection	PFA	References
100	C100	3 °	85 bar	SFB10N60AG-E02
125	C64	3 °	63 bar	SFB12N60AG-E02
150	C64	3 °	63 bar	SFB15N60AG-E02
200	C64	3 °	63 bar	SFB20N60AG-E02
250	C50	3 °	50 bar	SFB25N60AG-E02
300	C50	3 °	41 bar	SFB30N60AG-E02
350	C40	3 °	38 bar	SFB35N60AG-E02
400	C40	3 °	35 bar	SFB40N60AG-E02
450	C40	3 °	32 bar	SFB45N60AG-E02
500	C40	3 °	30 bar	SFB50N60AG-E02
600	C40	2 °	30 bar	SFB60N60AG-E02
700	C30	2 °	27 bar	SFB70G70AG-E02
800	C30	2 °	25 bar	SFB80G70AG-E02
900	C30	1.5 °	25 bar	SFB90G70AG-E02
1000	C30	1.2 °	25 bar	SFC10G70AG-E02

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN≥800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.


Accessories



Elastomer Sleeve TT PE -
Protection of joints of
pipes and fittings DN60
to 300

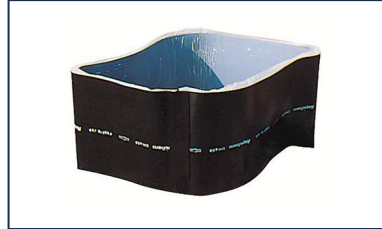


Heat-shrink Collar for TT
PE Standard and
Universal

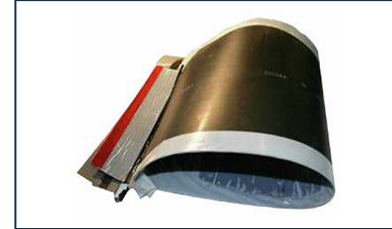

Heat-shrink Collar for TT
PE Standard et Universal
- Roll


Linked products

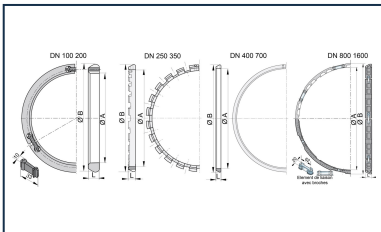


UNI STD Ve joint for
Pipes and Fittings
DN80-1600



Assembling and
disassembling wedges for
Universal Ve Joint

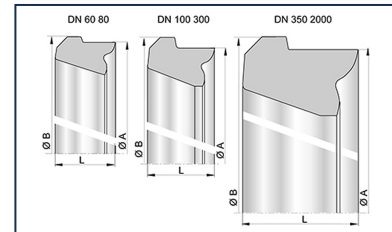

Standard gasket for Pipes
and Fittings DN60-2000

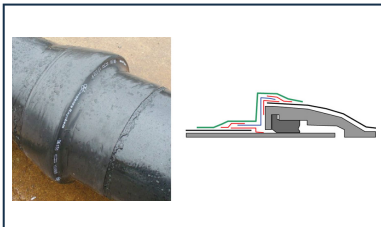

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.