


Bend ALPINAL with 2 sockets UNIVERSAL TYTON

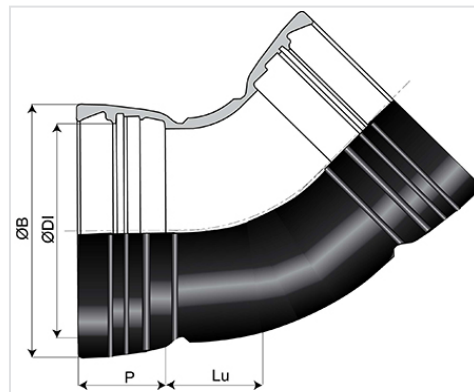

Angle	DN	Lu	P	Ø DI	Ø B	Mass	References
22°30	80 mm	38.3 mm	120 mm	100.5 mm	149 mm	6.70 kg	ANA80CD
45°	100 mm	64.4 mm	142 mm	120.5 mm	177 mm	14.50 kg	ANB10CB
11°15	100 mm	32.9 mm	142 mm	120.5 mm	177 mm	13.50 kg	ANB10CE
30°	150 mm	64.7 mm	150 mm	172.5 mm	230 mm	23.00 kg	ANB15CC
22°30	150 mm	54.3 mm	150 mm	172.5 mm	230 mm	22.50 kg	ANB15CD
11°15	150 mm	39.3 mm	150 mm	172.5 mm	230 mm	21.00 kg	ANB15CE
22°30	200 mm	65.8 mm	158 mm	224.5 mm	290 mm	36.00 kg	ANB20CD
11°15	200 mm	45.7 mm	158 mm	224.5 mm	290 mm	36.00 kg	ANB20CE
45°	250 mm	130 mm	165.1 mm	276.5 mm	366.2 mm	81.90 kg	ANB25CBA
11°15	250 mm	50 mm	165.1 mm	276.5 mm	366.2 mm	71.80 kg	ANB25CEA

Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- Internal lining: cement mortar
- External coating: bituminous paint
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

Linked products



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Vi Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.