


Bend IZIFIT with 2 sockets

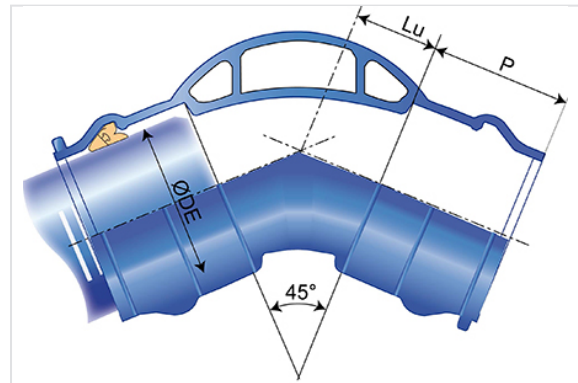

with IZIFIT gasket included

Angle	DN/OD (mm)	ØDE (mm)	P (mm)	Lu (mm)	Mass (kg)	References
90°	75	75	87	70	4.40	KTL75CA
90°	90	90	92.5	75	5.50	KTL90CA
90°	110	110	99	85	7.10	KTM11CA
90°	125	125	104	110	8.80	KTM12CA
45°	75	75	87	45	4.20	KTL75CB
45°	90	90	92.5	50	5.10	KTL90CB
45°	110	110	99	60	6.20	KTM11CB
45°	125	125	104	65	7.00	KTM12CB
22°30'	75	75	87	25	3.40	KTL75CD
22°30'	90	90	92.5	30	4.40	KTL90CD
22°30'	110	110	99	30	5.50	KTM11CD
22°30'	125	125	104	30	6.60	KTM12CD
11°15'	75	75	87	25	3.50	KTL75CE
11°15'	90	90	92.5	25	3.80	KTL90CE
11°15'	110	110	99	30	5.80	KTM11CE
11°15'	125	125	104	30	6.70	KTM12CE

with IZIFIT Vi anchored gasket included

Angle	DN/OD	Ø DE	P	Lu	Mass	References
90°	75	75 mm	87 mm	70 mm	4.40 kg	KVL75CA
90°	90	90 mm	92.5 mm	75 mm	5.50 kg	KVL90CA
90°	110	110 mm	99 mm	85 mm	7.10 kg	KVM11CA
45°	75	75 mm	87 mm	45 mm	4.20 kg	KVL75CB
45°	90	90 mm	92.5 mm	50 mm	5.10 kg	KVL90CB
45°	110	110 mm	99 mm	60 mm	6.20 kg	KVM11CB
45°	125	125 mm	104 mm	65 mm	7.00 kg	KVM12CB
22°30	75	75 mm	87 mm	25 mm	3.40 kg	KVL75CD
22°30	90	90 mm	92.5 mm	30 mm	4.40 kg	KVL90CD
22°30	110	110 mm	99 mm	30 mm	5.50 kg	KVM11CD
11°15	75	75 mm	87 mm	25 mm	3.50 kg	KVL75CE
11°15	90	90 mm	92.5 mm	25 mm	3.80 kg	KVL90CE
11°15	110	110 mm	99 mm	30 mm	5.80 kg	KVM11CE


Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U, PE or PVC-BO
- All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany


Main characteristics:

- Internal and external coating: blue epoxy powder (thickness 250 microns) according to EN 14901-1
- Joints in EPDM according to EN 681-1
- For transport and storage, the joints are protected by plugs
- Conformity to EN12842: ductile iron fittings for PVC-U or PE piping systems
- Conformity to ISO 16631-2016: ductile iron fittings for PVC-U or PE piping systems
- Conformity to NF T 54-948: plastics piping systems for water transport under pressure - pipes made of biaxial oriented poly(vinyl chloride) (PVC-BO)

Linked products

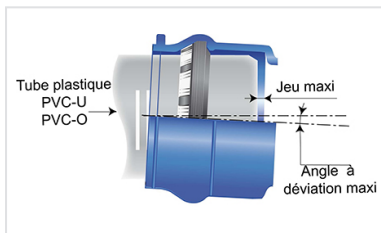

IZIFIT Joint for plastics piping systems

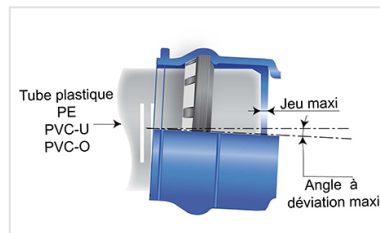

IZIFIT anchored Vi Joint for plastics piping systems

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.