


BIOGAN® Ring DN150-200

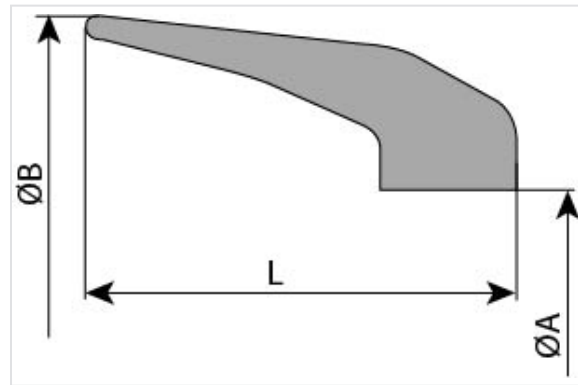

DN (mm)	L (mm)	ØA (mm)	ØB (mm)	Mass (kg)	References
150	37.5	165.2	196.6	0.18	JJB15UB
200	40	218.2	244.5	0.21	JJB20UB

Field of use:

- For gravitary sewage and under pressure networks
- Domestic wastewater and raw water
- Application: gravity flow and under pressure sewerage systems
- Compatible with BIOGAN pipes

Main characteristics:

- Elastomer type WG according to EN 681-1
- BIOGAN ring: quality NBR
- The BIOGAN ring is not a sealing ring and does not perform this function in any way
- The BIOGAN ring must not be mounted on a UNIVERSAL socket
- The BIOGAN ring does not modify the pressure performance of the seal on which it is mounted
- Allowing respect for the socket depth

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.