
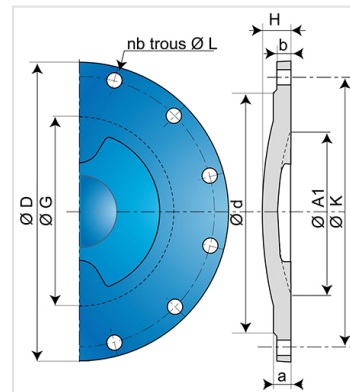


Blank Flange PROCESS FM PN25

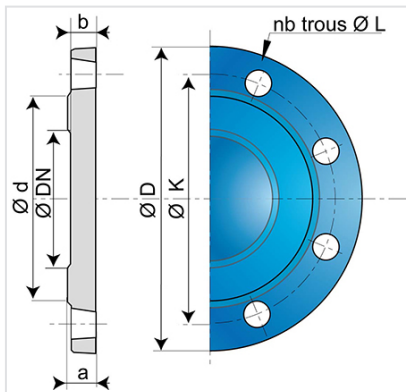

Ductile iron networks for fire protection

DN (mm)	PN 25	
	Mass (kg)	References
100	4.80	BBB10QN30TTF
150	8.50	BBB15QN30TTF
200	13.90	BBB20QN30TTF
250	22.00	BBB25QN30TTF
300	33.00	BBB30QN30TTF
400	63.00	BBB40QN30TTF

DN (mm)	PN	ØD (mm)	a (mm)	b (mm)	Ød (mm)	ØG (mm)	H (mm)	Number of holes	ØL (mm)	ØK (mm)	A1 (mm)
100	25	235	19	16	156			8	23	190	
150	25	300	20	17	211	140		8	28	250	130
200	25	360	22	19	274	190		12	28	310	180
250	25	425	24.5	21.5	330	240		12	31	370	230
300	25	485	27.5	23.5	389	290		16	31	430	250
400	25	620	32	28	503	385	68	16	37	550	350

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

Marking :

- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100-300



DN400

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.