


Blank Flange PUR PUX

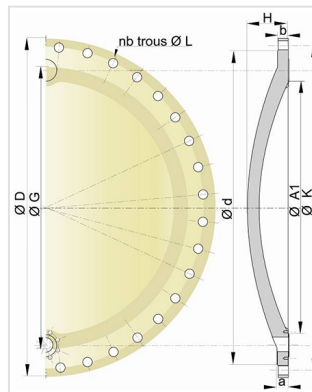

DN (mm)	$\varnothing D$ (mm)	a (mm)	b (mm)	$\varnothing d$ (mm)	$\varnothing G$ (mm)	H (mm)	Number of holes	$\varnothing L$ (mm)	$\varnothing K$ (mm)	PN 10	References
1400	1675	46	41	1530	1375	192	36	43	1590	847.00	BBC14QN10UU
1600	1915	49	44	1750	1575	218	40	50	1820	1239.00	BBC16QN10UU
2000	2325	55	50	2150	1975	270	48	50	2230	2272.00	BBC20QN10UU

Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating : polyurethane coating in accordance with Standard EN 15655
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.