


Cast Flange Spigot piece PUR PUX

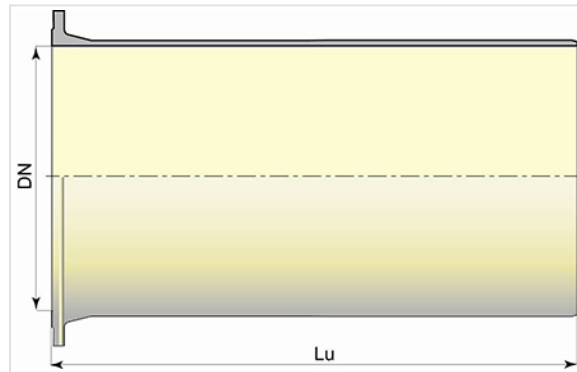

DN	Lu (mm)	PN 10		PN 16	
		Mass (kg)	References	Mass (kg)	References
1400	3000	3042	BBC14MB1GUU		
1500	3000	3305	BBC15MB1GUU		
1600	1000	1704	BBC16MB1CUU	1360	BBC16MB2CUU

Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating : polyurethane coating in accordance with Standard EN 15655
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot
galvanized steel bolts, nuts
and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.